
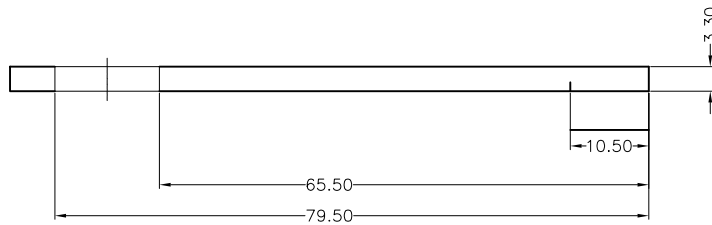
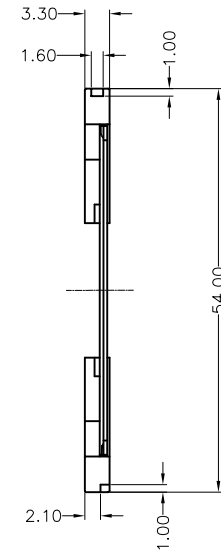


- NOTE :
1. MECHANICAL STRENGTH OF PULL TAB SHALL BE 8.5kgf MINIMUM PER ATG TEST SPECIFICATION QS-201.
 2. Frame material : PBT+30±GF 94V-0
 3. Ground contact : phospher bronze gold plating.

Large Ground Contact

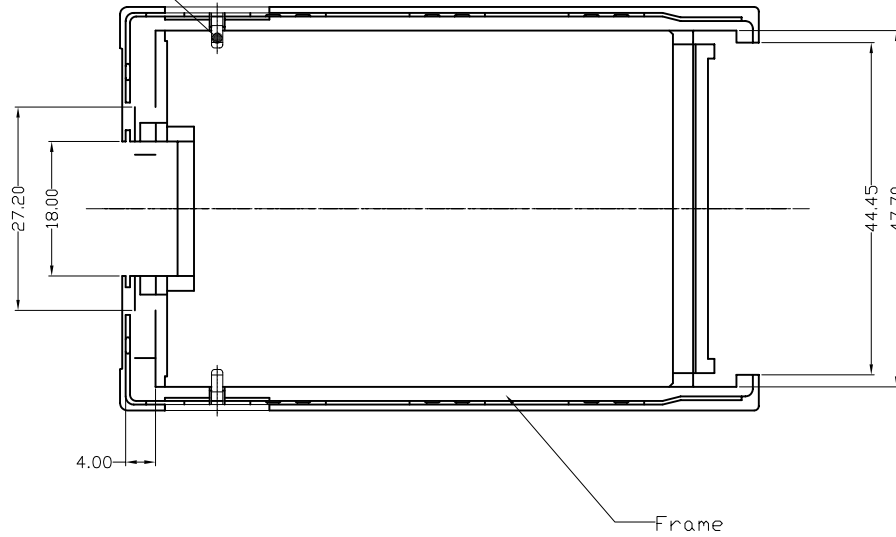

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

照片框

ORDER INFORMATION

PCC-CFxxM-15-LF
SERIES | | | LEADFREE
| | | 15WAY
| | | METAL
| | | 03:0.3mm OFF SET
COVER | | | 04:0.4mm OFF SET
FLAME

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: FRAME, TYPE II PC CARD