

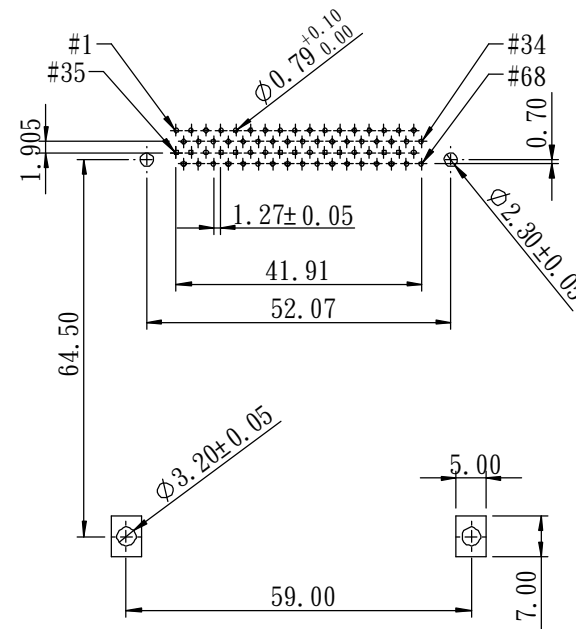
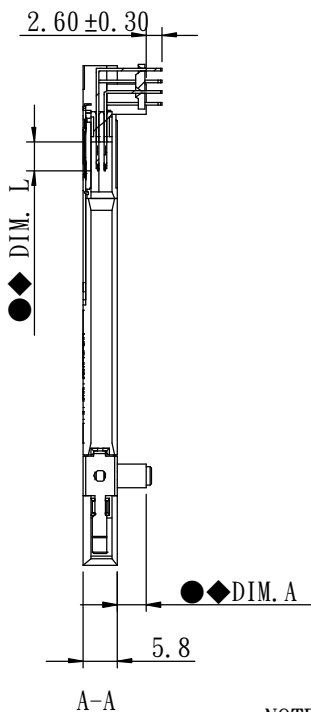


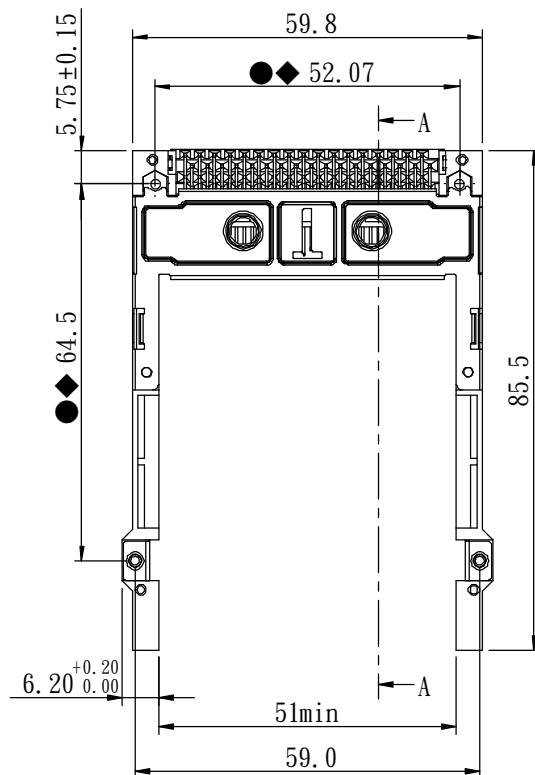

PCB LAYOUT : COMPONENT SIDE

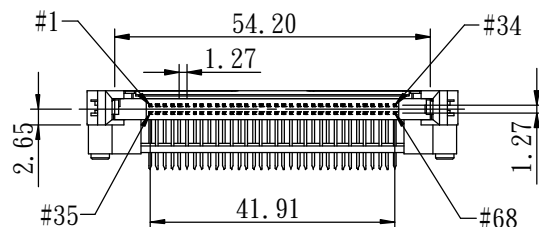

NOTE:

- INSPECTION SYMBOL:
 ● : MANUFACTURER INSPECTION
 ◆ : Q.C INSPECTION
- PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.

TABLE 1

PIN TYPE	DIM. L ± 0.20	PIN NUMBER
DETECT	3.50 mm	36 , 67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	1, 17, 34, 35, 51, 68

PART NO.	DIM. A ± 0.20
PCC-PRL50V3M-68	5.00
PCC-PRL80V3M-68	8.00
PCC-PRL150V3M-68	15.00
PCC-PRL180V3M-68	18.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.30
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG $\pm 1^\circ$

PPOJECTION

照片框

ORDER INFORMATION

PCC-PRLxxV3M-68-LF

SERIES
 MALE DIP 90°
 LONG RAIL
 50:5.0mm/STANDOFF
 75:7.5mm/STANDOFF
 80:8.0mm/STANDOFF
 LEADFREE
 68WAY
 METAL
 3.3V
 150:15.0mm/STANDOFF
 180:18.0mm/STANDOFF

DESCRIPTION: