
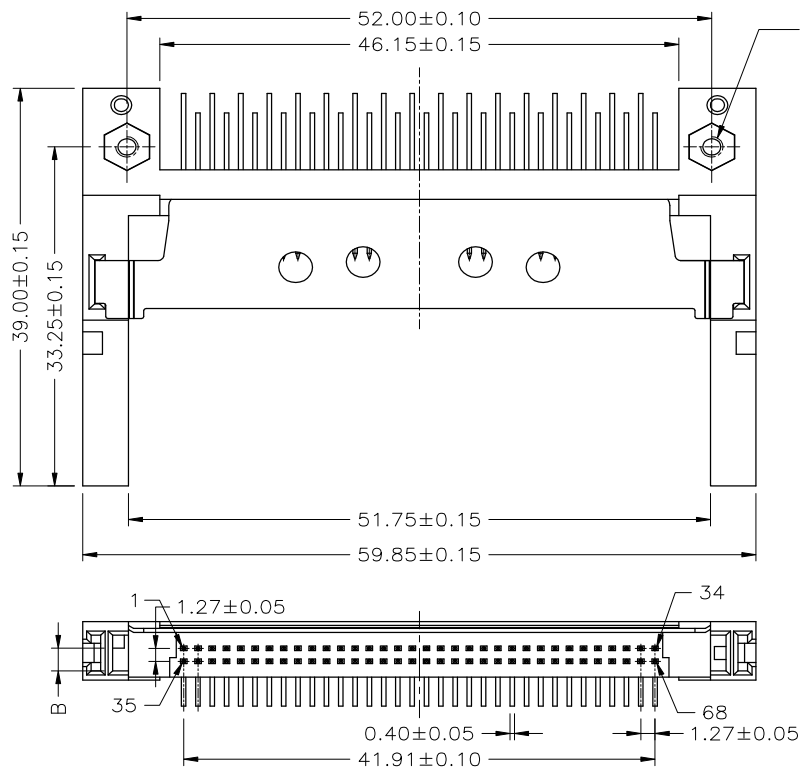


THE DIRECTION OF INSERTING CARD

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)




Ordering Information

PART NO.	B A	DIM. B = 1.1 mm (0) Voltage 5V	DIM. B = 2.2 mm (V) Voltage 3.3V
		PCC-PRM00V5-68	PCC-PRM00V3-68

Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

1.MATERIAL:
HOUSING: LCP, BLACK, UL94V-0
CONTACTS: COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL.

2.ELECTRICAL:
CURRENT RATING: 0.5A AC, DC
TEMPERATURE RANGE: -40°C ~ +85°C
INSULATION RESISTANCE: 1000MΩ MIN. (500V DC)
CONTACT RESISTANCE: 40mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC/MINUTE

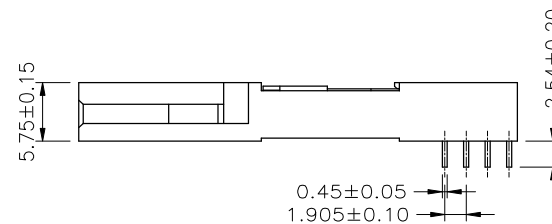

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCC-PRM00Vx-68-LF
SERIES
MALE
DIP 90°
LEADFREE
68WAY
V3:3.3V
V5:5.0V
STANDOFF 0.0mm
METAL

DESCRIPTION: 1.27mm PITCH, 68 CIRCUITS, DIP TYPE, PC CARD CONNECTOR