
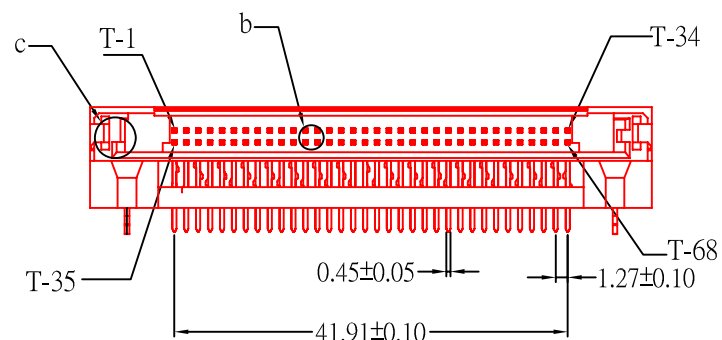
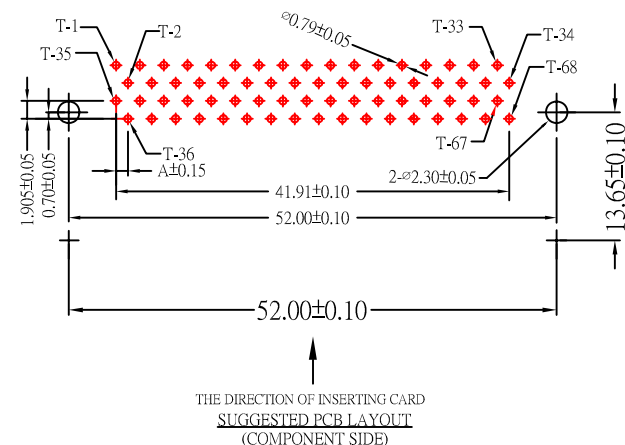
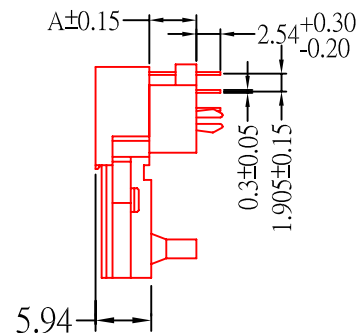
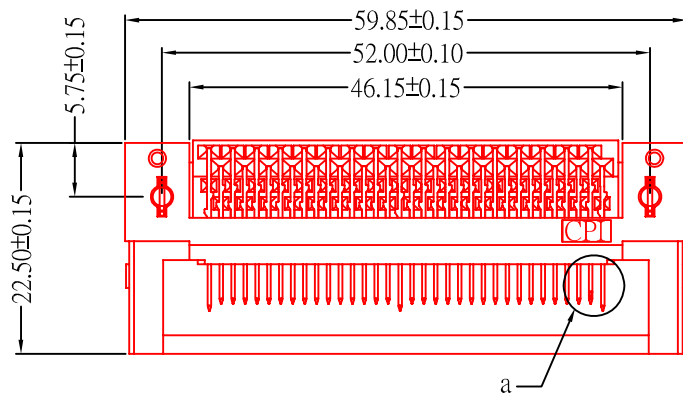



| Pin Type | Interface Dim. | Pin No.               |
|----------|----------------|-----------------------|
| Detect   | 3.50 mm        | 36, 67                |
| General  | 4.25 mm        | all other pins        |
| Power    | 5.00 mm        | 1, 17, 34, 35, 51, 68 |

#### Ordering Information

| A \ B          | DIM. B = 1.1 mm<br>(0) Voltage 5V | DIM. B = 2.2 mm<br>(V) Voltage 3.3V |
|----------------|-----------------------------------|-------------------------------------|
| (G) A = 2.2mm  | PCC-PRN22V5Z-68                   | PCC-PRN22V3Z-68                     |
| (J) A = 5.0mm  | PCC-PRN50V5Z-68                   | PCC-PRN50V3Z-68                     |
| (Z) A = 12.0mm | PCC-PRN120V5Z-68                  | PCC-PRN120V3Z-68                    |



**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

PCC-PRNxxVxZ-68-LF  
SERIES T LEADFREE  
MALE DIP 90° CLIP 68 WAY  
SMALL RAIL V3:3.3V V5:5.0V  
22,50,120 mm HIGH

DESCRIPTION: PC68公座單層無支架墊高5.0卡槽2.2/1.1前2.3魚叉孔后帶墊高柱有塑膠支撐片成品(B TYPE)