




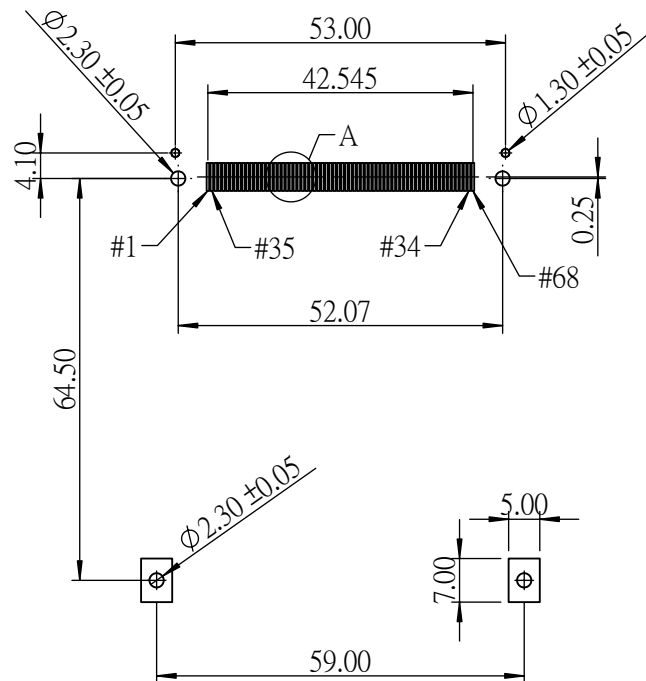

PCB LAYOUT : COMPONENT SIDE



A (2 : 1)

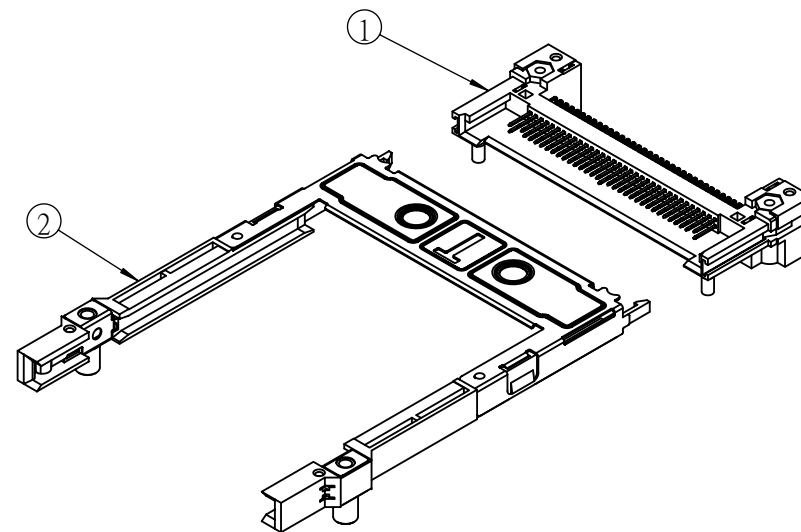

ITEM	PART NO.	NAME
1		HEADER
2		EJECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±




PPOJECTION

照片框

ORDER INFORMATION

PCC-PWL40V3-68-LF
SERIES MALE 3.3V STAND OFF 4.0mm LONG RAIL 90°SMT LEADFREE 68WAY

DESCRIPTION: PCMCIA ASSEMBLY

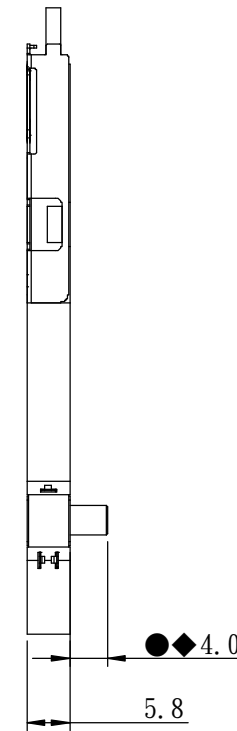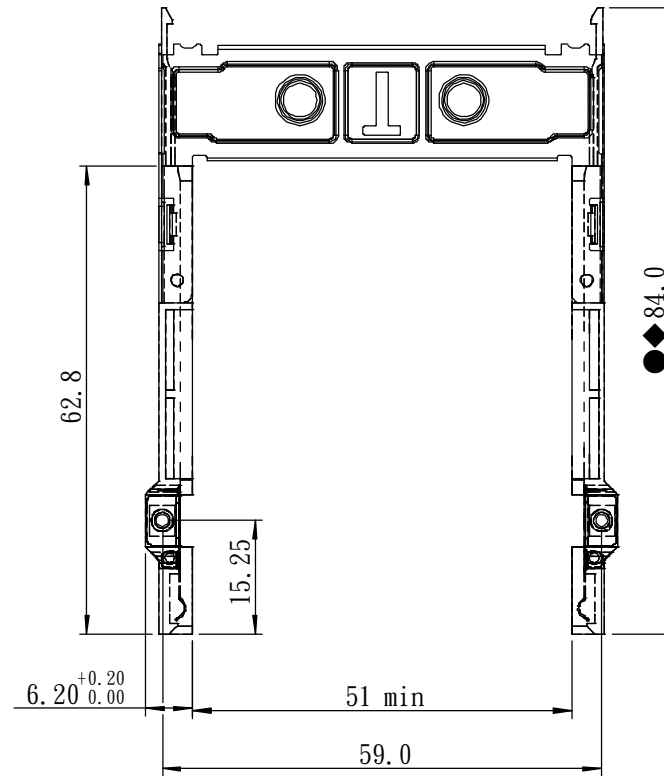

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION




ORDER INFORMATION

PCC-PWL40V3-68-LF
SERIES | | | | LEADFREE
MALE | | | | 68WAY
3.3V
STAND OFF 4.0mm
LONG RAIL
90°SMT


煜倫股份有限公司

www.morethanall.com


DESCRIPTION: PCMCIA ASSEMBLY

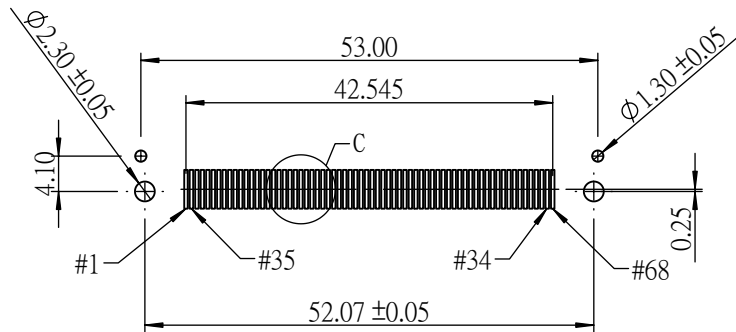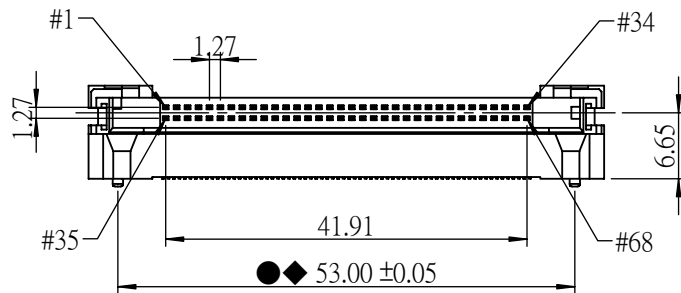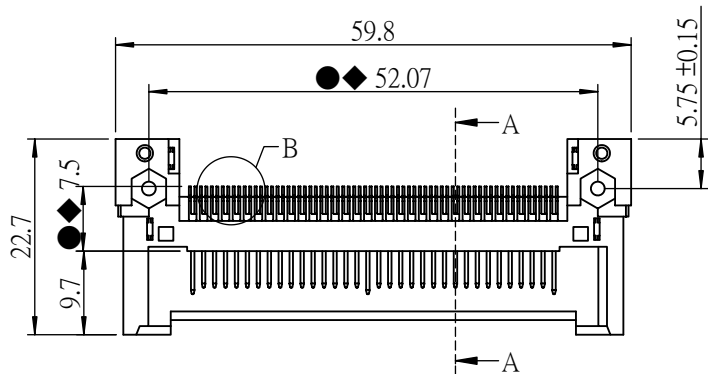


PCB LAYOUT : COMPONENT SIDE

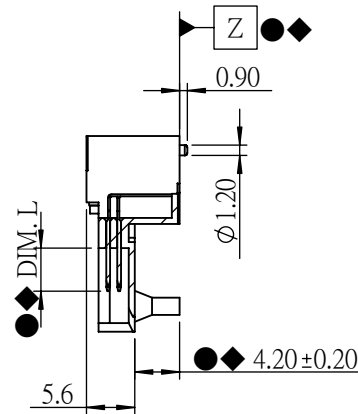

A-A



B (3 : 1)



C (4 : 1)

NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDER TAILS TO BE WITHIN 0.12. MEASUREMENT POINT IS SOLDER TAILS TIP.
2. INSPECTION SYMBOL:
 ● : MANUFACTURER INSPECTION
 ◆ : Q.C INSPECTION
3. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.

TABLE 1

PIN TYPE	DIM. L ±0.20	PIN NUMBER
DETECT	3.50 mm	36 , 67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	1, 17, 34, 35, 51, 68

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PCC-PWL40V3-68-LF
 SERIES MALE 3.3V STAND OFF 4.0mm
 68WAY LONG RAIL
 90°SMT LEADFREE

DESCRIPTION: PCMCIA ASSEMBLY