

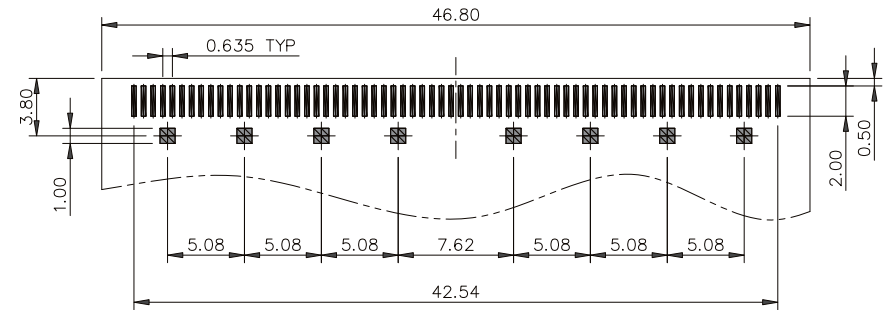
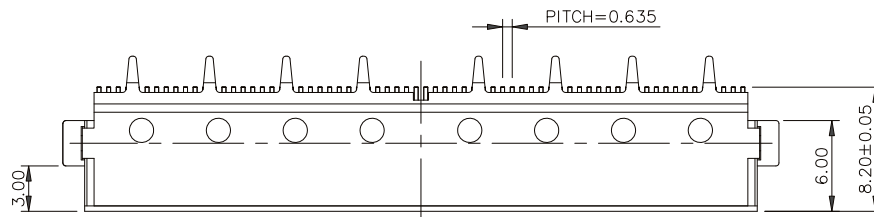


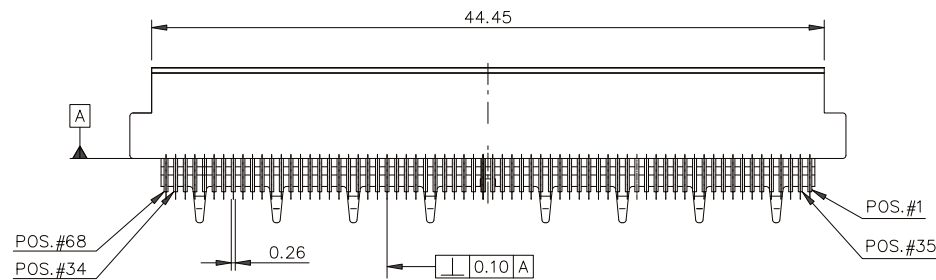

RECOMMENDED PCB LAYOUT

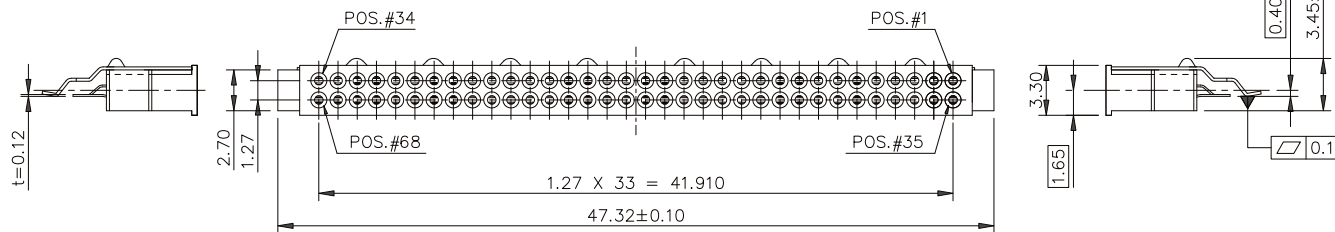

Note

1.Material:

Contact—Copper Alloy
Grounding Plate—Copper Alloy
Housing— High Temp Thermoplastic (UL 94V-0)

2.Plating:

Underplate : 30u"(0.76um) Nickel
Solder Tails : 100u"(2.54um)/ Tin (Lead free)

3.Electrical:

Current Rating : 0.5A
Insulation Resistance : >1x10⁹ ohm at 500 Vdc
>1x10⁸ ohm at 500 Vdc
after Enviromental Conditioning
Withstanding Voltage : 500 Vrms at Sea Level

4.Environmental:

Temperature Rating : -10°C to +70°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PCC-SWA04MR-68-LF
SERIES | | | | | LEADFREE
FEMALE | | | | | REEL
90°SMT | | | | | METAL
OFFSET 0.4mm
A TYPE

DESCRIPTION:

