
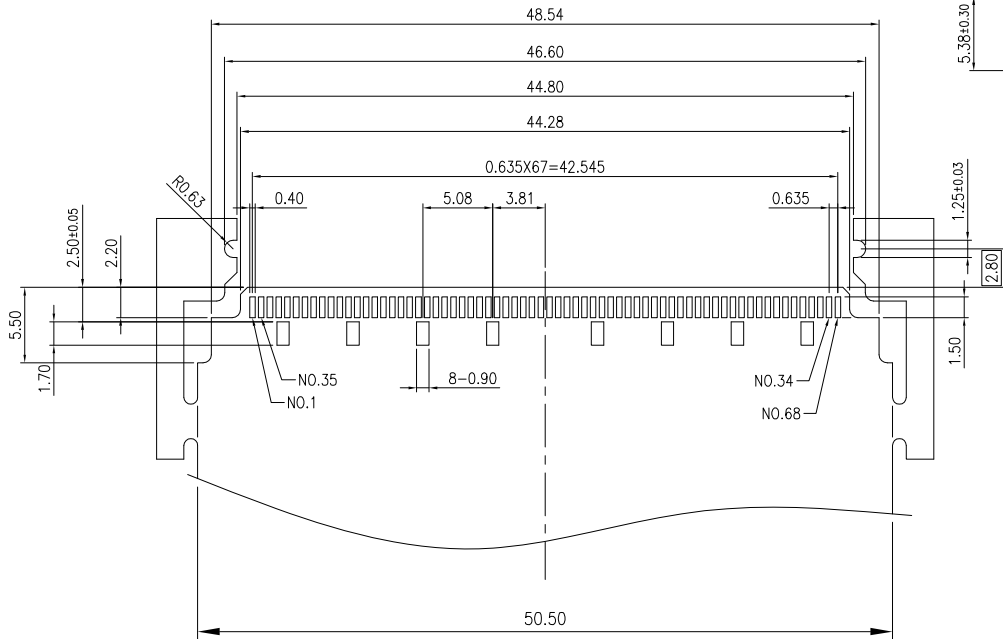
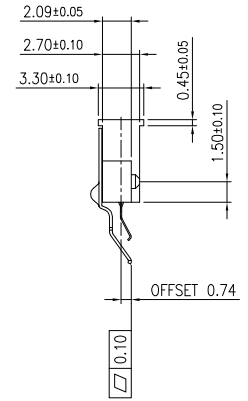
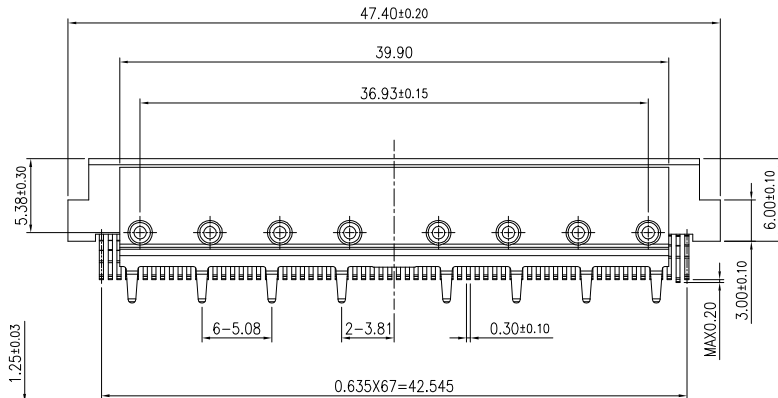
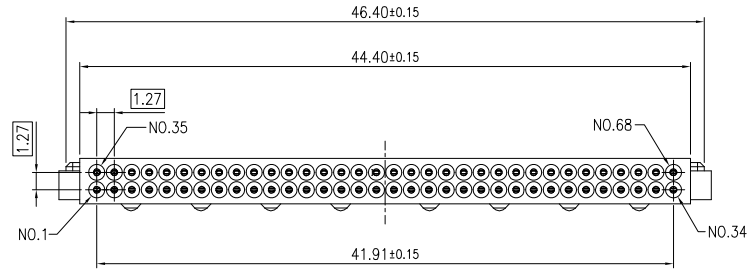


NOTES

1. ELECTRICAL:
 VOLTAGE: 100V
 CURRENT: 0.5A
 CONTACT RESISTANCE: 40MΩ MAX
 DIELECTRIC WITHSTANDING: 500V AC
 INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL:
 CONTACT RETENTION TO HOUSING: 4.9N MIN
 MATING FORCE: 39.2N MAX
 UNMATING FORCE: 6.67N MIN
 DURABILITY: 10,000 CYCLES
3. PLATING:
 CONTACT AREA: SEE NOTE 4
 SOLDER TAIL AREA: GOLD FLASH
 UNDER PLATING 50μ" MIN NICKEL ALL OVER

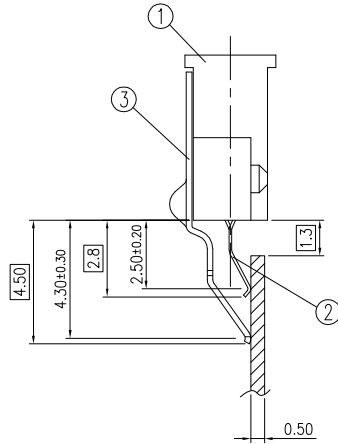

RECOMMENDED P.C.B LAYOUT

序號	名稱	材料規格
1	主體	LCP; COLOR: BLACK
2	上下排端子	C5210
3	CARDBUS	C2680

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

X. ± 0.25
 .X ± 0.20
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

PCC-SWA07M-68-LF
 SERIES LEADFREE
 68WAY
 METAL
 OFFSET 0.74mm
 FEMALE A TYPE
 90°SMT

DESCRIPTION: PCMCIA F 68 POS SMT CARDBUS 0.74 OFFSET