
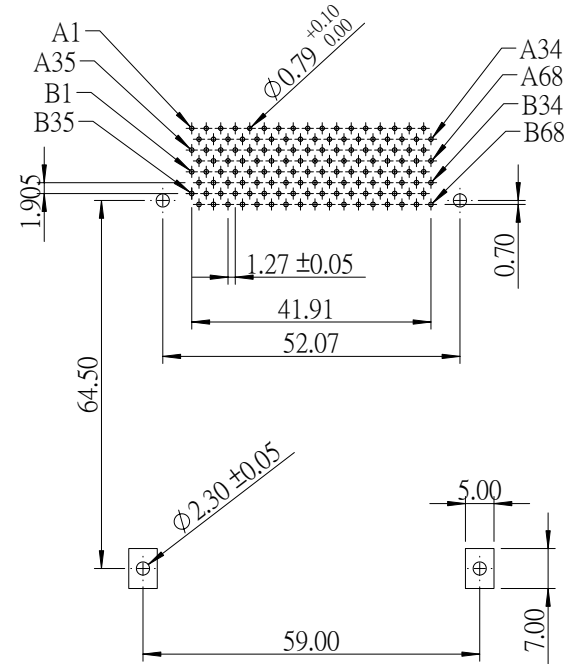
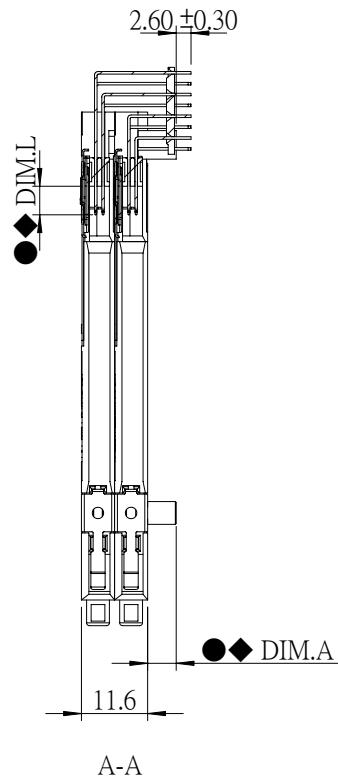


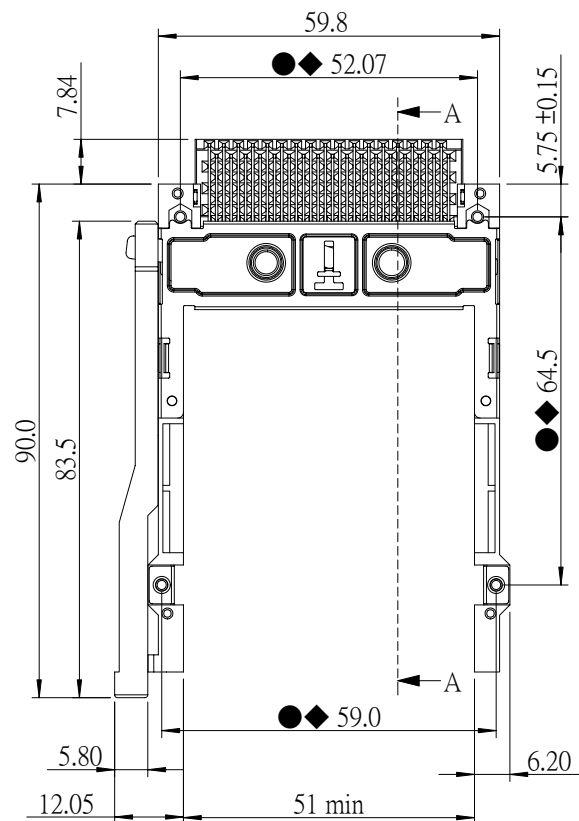

PCB LAYOUT : COMPONENT SIDE


NOTE:

1. INSPECTION SYMBOL:

● : MANUFACTURER INSPECTION

◆ : Q.C INSPECTION

2. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.
TABLE 1

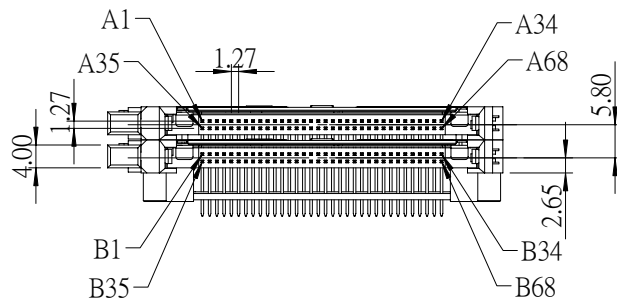

PART NO.	DIM. A ± 0.20
PCCB1-PRL20V3LS-68	2.00
PCCB1-PRL40V3LS-68	4.00
PCCB1-PRL50V3LS-68	5.00

PIN TYPE	DIM. L ± 0.20	PIN NUMBER
DETECT	3.50 mm	A36,A67,B36,B67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	A1,A17,A34,A35,A51,A68 B1,B17,B34,B35,B51,B68

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCCB1-PRLxxV3LS-68-LF

SERIES

LEADFREE

68WAY

LEFT STRAIGHT

MALE

DIP 90°

LONG RAIL

3.0V

20:STANDOFF 2.0mm

50:STANDOFF 5.0mm

DESCRIPTION: PCMCIA ASSEMBLY