




MATERIAL:
 HOUSING: HIGH TEMPERATURE
 THERMOPLASTIC BLACK UL 94V-0
 CONTACTS: COPPER ALLOY,
 GOLD PLATED ON CONTACT AREA,
 TIN PLATED ON SOLDER TAIL.
 GUIDE/PUSH BUTTON: PBT,UL94V-0

ELECTRICAL:
 CURRENT RATING: 0.5A AC, DC
 TEMPERATURE RANGE: -20°C ~ +60°C
 INSULATION RESISTANCE: 1000M Ω MIN.(500V DC)
 CONTACT RESISTANCE: 40m Ω MAX.
 WITHSTANDING VOLTAGE: 500V AC/MINUTE


Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

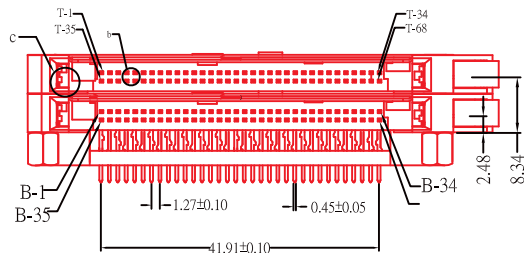

Ordering Information

A	B	DIM. B = 1.1 mm	DIM. B = 2.2 mm
		(V) Voltage 5V	(V) Voltage 3.3V
(0) A = 0.0mm		PCCB1-PRL00V5RS-68	PCCB1-PRL00V3RS-68
(0) A = 5.0mm		PCCB1-PRL50V5RS-68	PCCB1-PRL50V3RS-68

RoHS Compliant

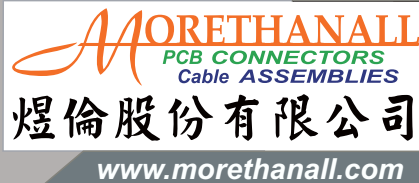


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE
 X, ±
 .X ± 0.05
 .XX ± 0.01
 .XXX ± 0.002
 ANG ±

照片框

ORDER INFORMATION

PCCB1-PRLxxVxRS-68-LF

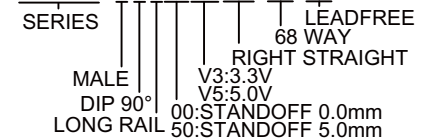

DESCRIPTION: PC68公座雙層右短(厚)塑膠 推杆墊高5.0/0.0卡槽2.2/1.1
 前螺絲后六角螺絲 標準支架無支架固定鋼片成品