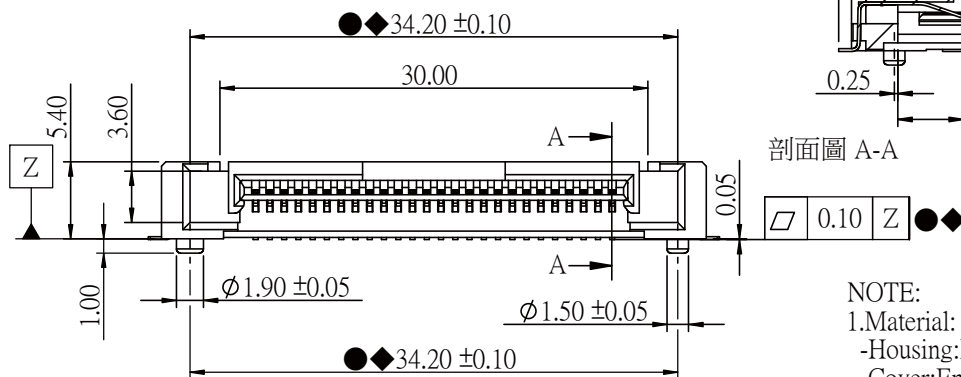
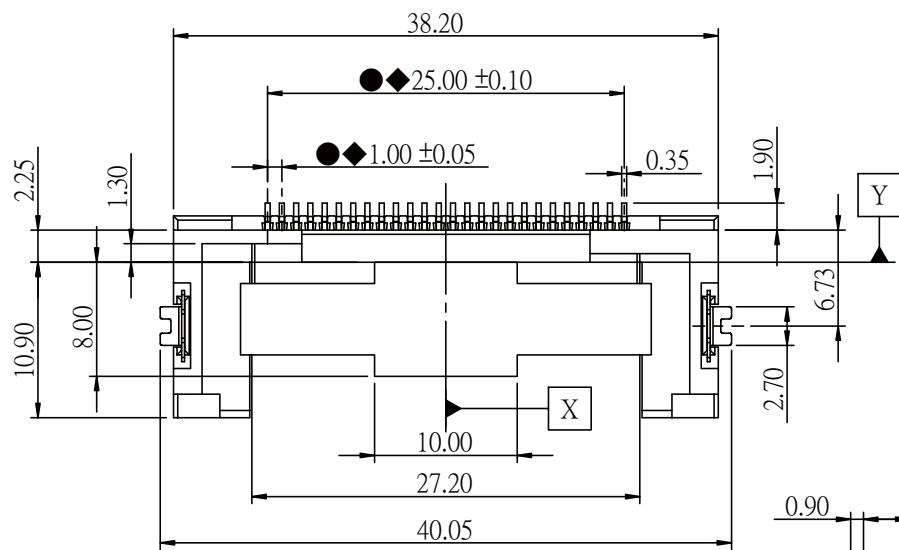


剖面圖 A-A


NOTE:

1.Material:


- Housing:Engineering Plastic,LCP+30%G.F.UL94V-0 Rated
- Cover:Engineering Plastic,LCP+30%G.F.UL94V-0 Rated
- Contact:Copper Alloy
- Fitting nail:Copper Alloy

2.Plating:

- Contact:
- .Underplating:40~150u"Nickel over all
- .Contact Area: Gold 15u"
- .Solder Tail:60~200u"Tin
- Fitting nail:60~200u"Tin

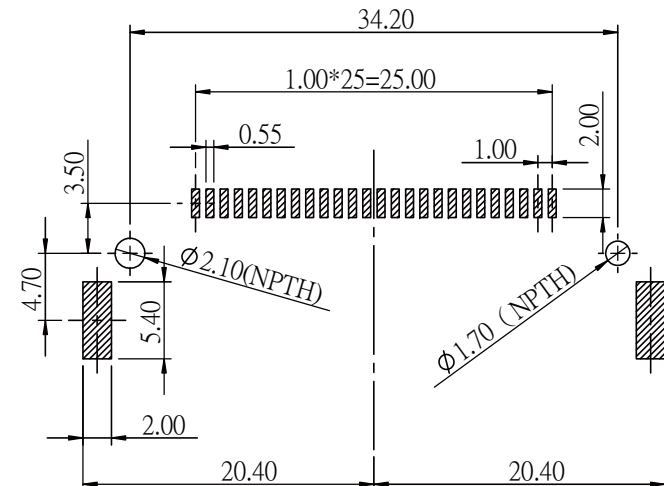

RECOMENDED PCB LAYOUT
TOLERANCE:±0.05(TOP VIEW)

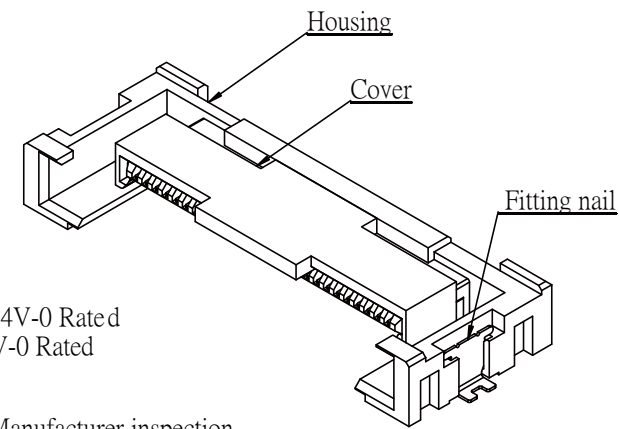

- 3.●:Manufacturer inspection
- 4.◆:O.C Inspection

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±


PPOJECTION

ORDER INFORMATION


PCE-PWPCR-26-LF

SERIES
MALE
POST
90°SMT
LEADFREE
26 WAY
REEL
COVER

DESCRIPTION: Header for express card connector, top mount,stand-off 0.00mm

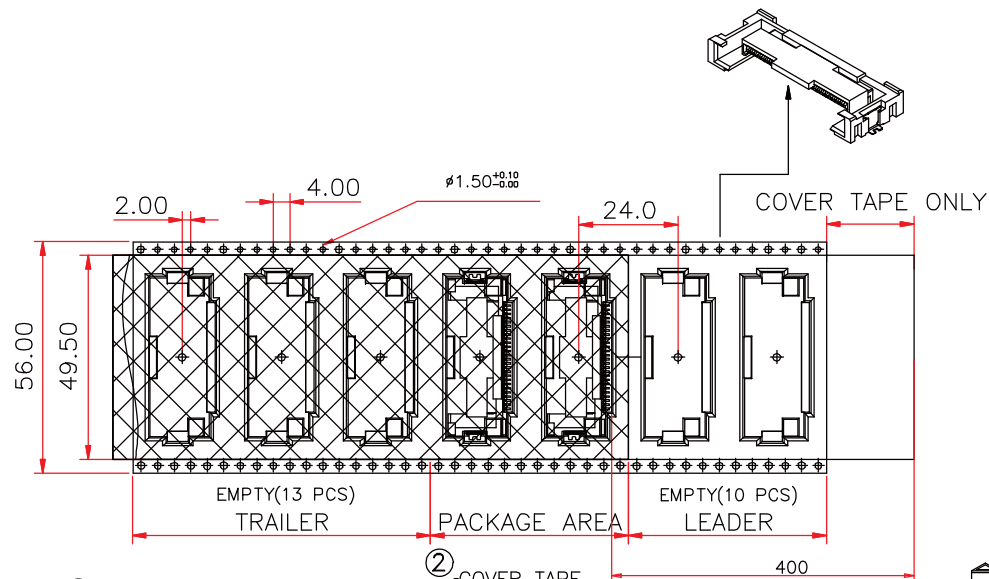

	MATERIAL	P/N	REMARKS
1	REEL	REEL-RA356	H=56.4mm
2	COVER	REEL-UC495 $\triangle B$	W=49.5mm
3	CARRIER TAPE	REEL-102LAB5601	W=56mm
4	LABEL (for Reel)	CTP-00002	1 LABEL/CARTON
5	LABEL (for Reel)	CTB-00004	1 LABEL/REEL
6	LABEL (for Reel)	CTB-00005	1 LABEL/REEL
7	CARTON	CTN-C100R	CARTON/5REEL/1500pcs
8	POLY BAG	P-0001	1 BAG/CARTON
9	GUARD	CTN-N3026	4 GUARDS/CARTON

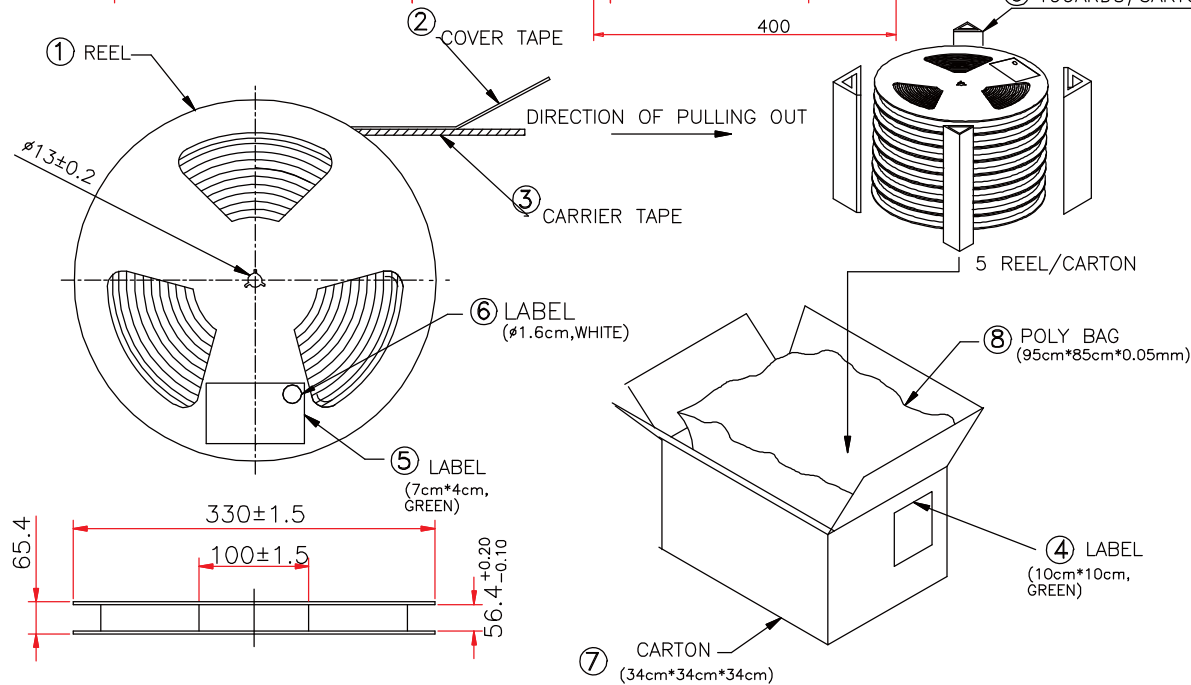

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

PCE-PWPCR-26-LF
 SERIES | | | | LEADFREE
 | | | | 26 WAY
 | | | | REEL
 | | | | COVER
 MALE | POST
 90°SMT

DESCRIPTION: PACKING INFORMATION

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION Φ

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$