


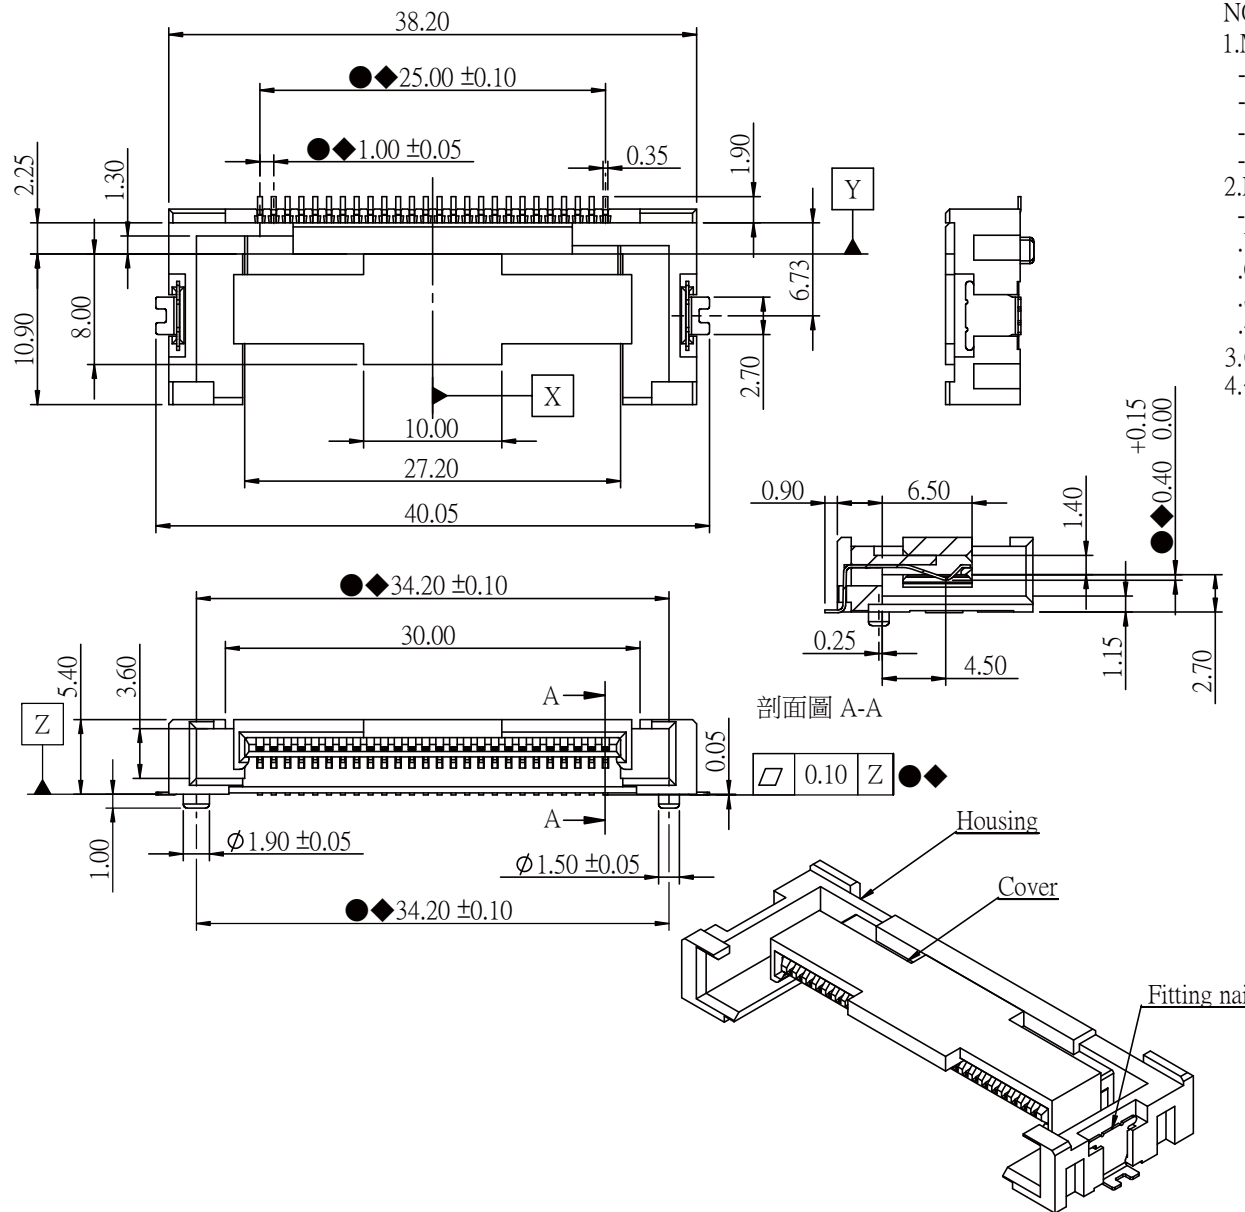

#### NOTE:

##### 1.Material:


- Housing:Engineering Plastic,LCP+30%G.F.UL94V-0 Rated
- Cover:Engineering Plastic,LCP+30%G.F.UL94V-0 Rated
- Contact:Copper Alloy
- Fitting nail:Copper Alloy

##### 2.Plating:

- Contact:
- .Underplating:40~150u"Nickel over all
- .Contact Area: Gold 15u"
- .Solder Tail:60~200u"Tin
- Fitting nail:60~200u"Tin

##### 3.●:Manufacturer inspection

##### 4.◆:O.C Inspection

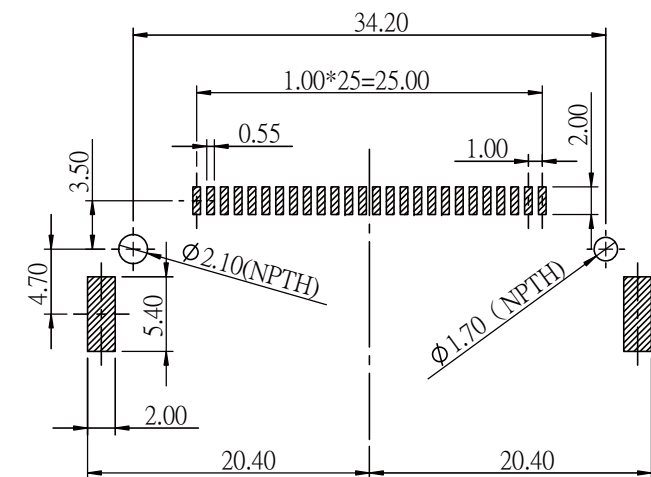

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION



照片框

#### ORDER INFORMATION

PCE-PWPP34-26-LF

SERIES  
LEADFREE  
26WAY  
PUSH 34mm  
POST  
90°SMT  
MALE

DESCRIPTION: Header for express card connector, top mount, stand-off 0.00mm

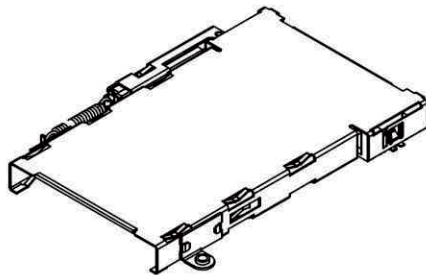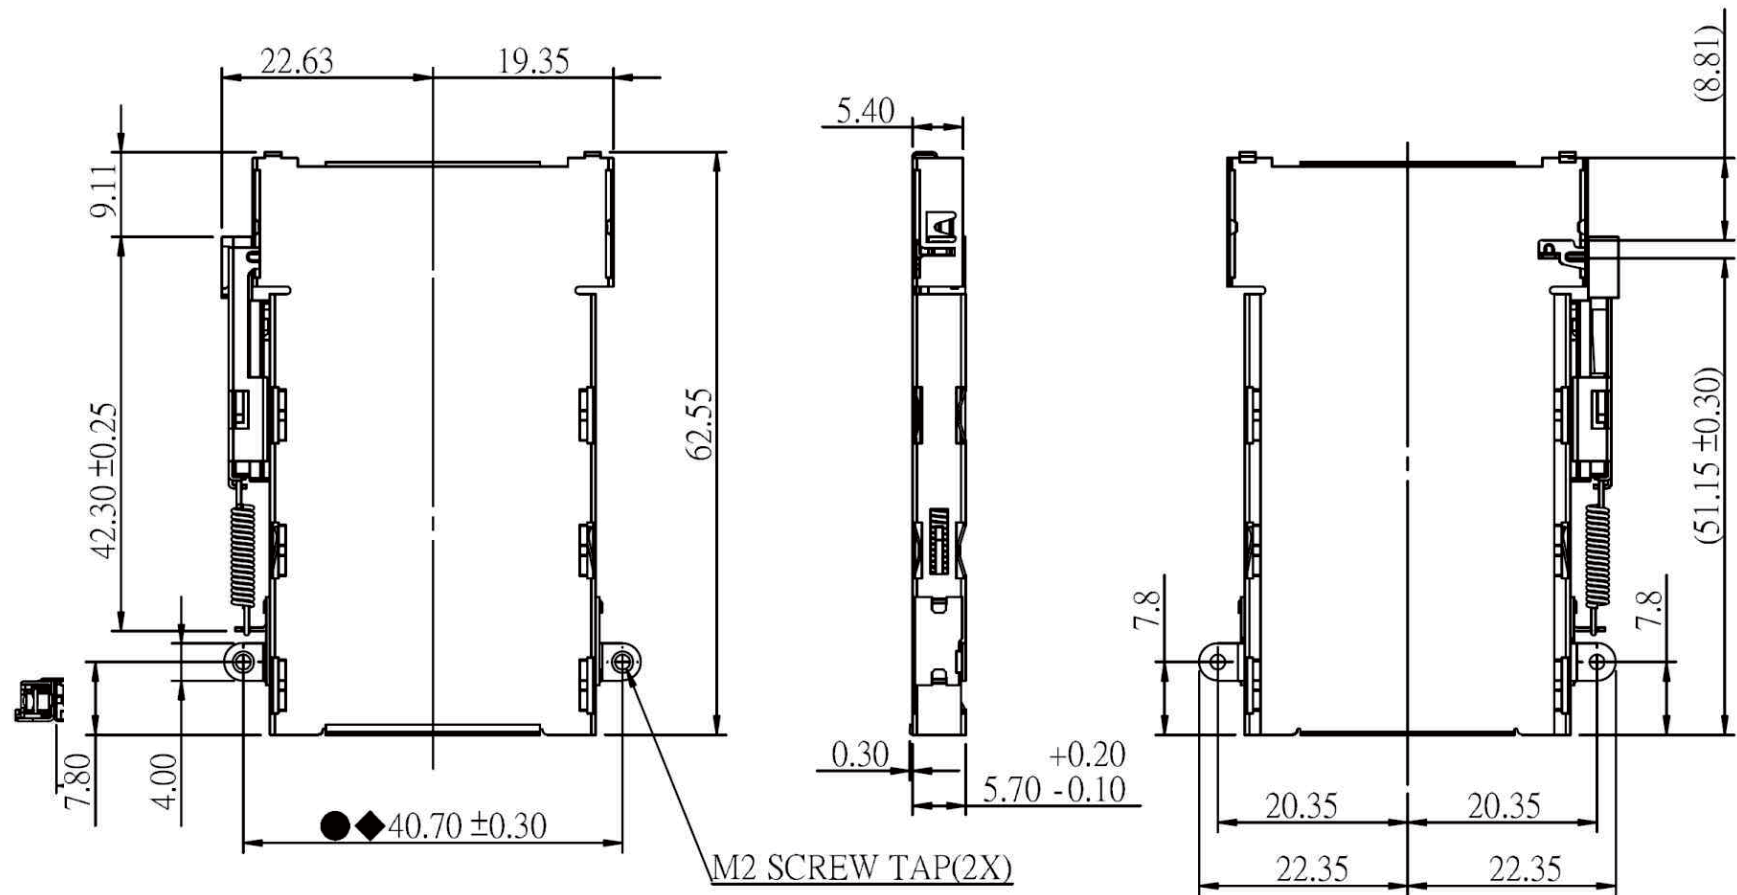

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

煜倫股份有限公司

www.morethanall.com

ORDER INFORMATION

PCE-PWPP34-26-LF

SERIES

LEADFREE

26WAY

PUSH 34mm

POST

90°SMT

MALE

DESCRIPTION: