


NOTE:

1. Material:
  - Housing: Engineering Plastic, LCP+30%G.F. UL94V-0 Rated
  - Cover: Engineering Plastic, LCP+30%G.F. UL94V-0 Rated
  - Contact: Copper Alloy
  - Fitting nail: Copper Alloy
2. Plating:
  - Contact:
    - . Underplating: 40~150u" Nickel over all
    - . Contact Area: Gold 15u"
    - . Solder Tail: 60~200u" Tin
    - . Fitting nail: 60~200u" Tin
3. ●: Manufacturer inspection
4. ◆: O.C Inspection

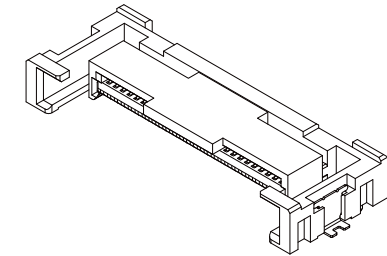

剖面圖 A-A

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

照片框

ORDER INFORMATION

PCE-PWPRV-26-LF  
SERIES | LEADFREE  
26WAY  
REVERSED  
POST  
90°SMT  
MALE

DESCRIPTION: