



Section B-B

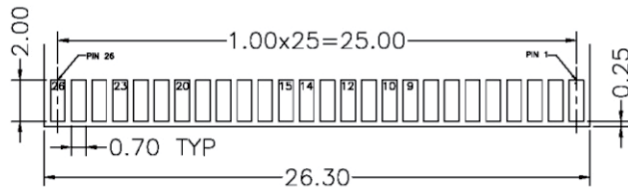

Recommend P.C.B. layout
Tolerances ± 0.05 mm

Notes:

- 1). Material:
Insulator: LCP+30% G.F., UL 94V-0 rated, Color Black.
Contact: Phosphor Bronze
- 2). Plating
Contact area: Gold Plating 15 U" over Ni underplate.
Soldering Zone: Tin over Ni. undreplate.

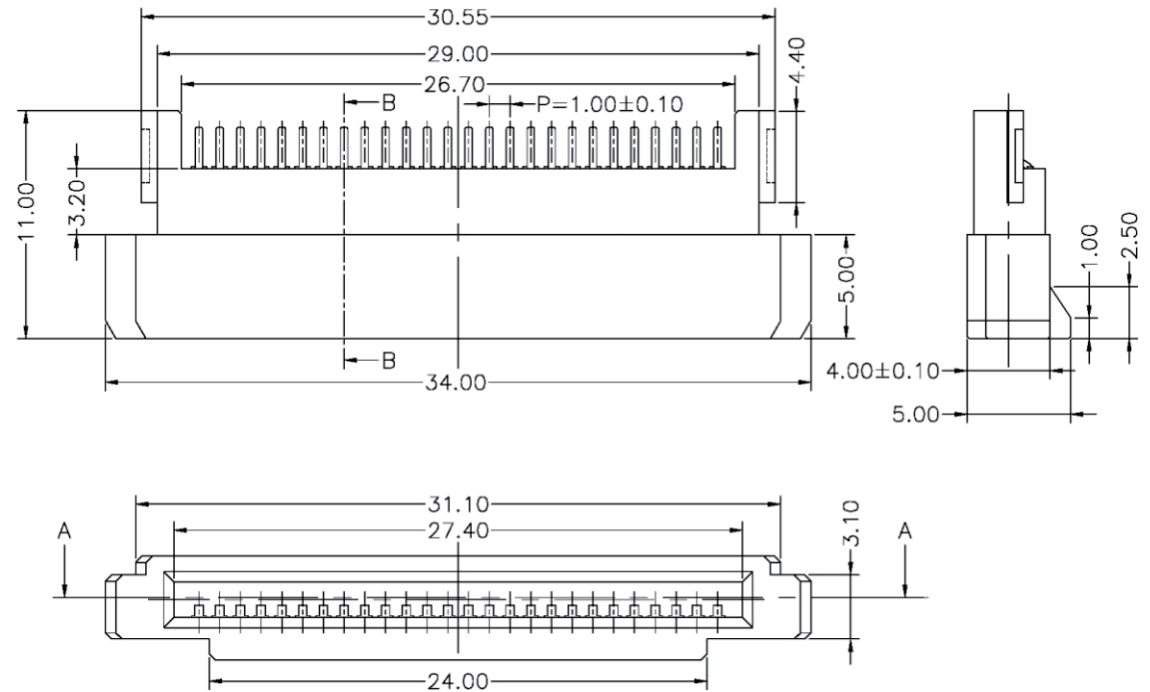

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X. \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm

照片框

ORDER INFORMATION

PCE-SW-26-LF
SERIES | LEADFREE
26 WAY
90°SMT
FEMALE

DESCRIPTION: