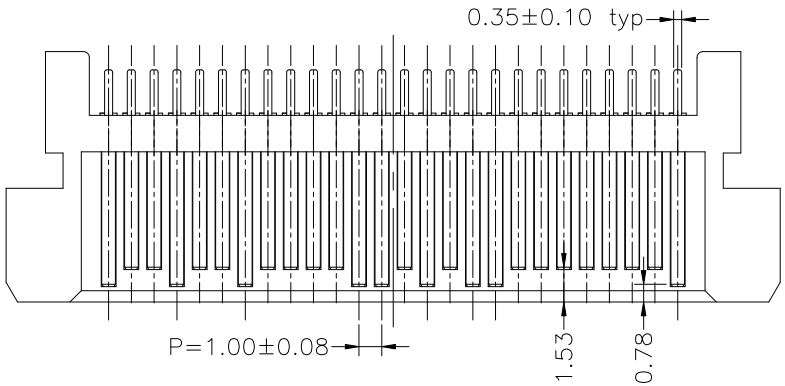

Notes:

1). Material:
Insulator: LCP+30% G.F., UL 94V-0 rated,Color Black.
Contact: Phosphor Bronze

2). Plating
Contact area: Gold Plating 15 U" over Ni underplate.
Soldering Zone: Tin over Ni. undreplate.

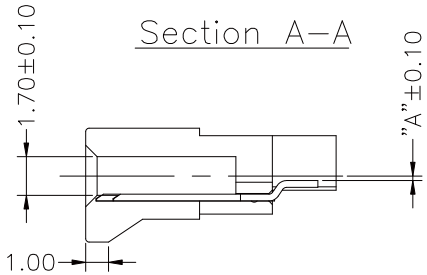

Section A-A

Section B-B

"A"=0.0mm
0.2mm
0.5mm
1.0mm

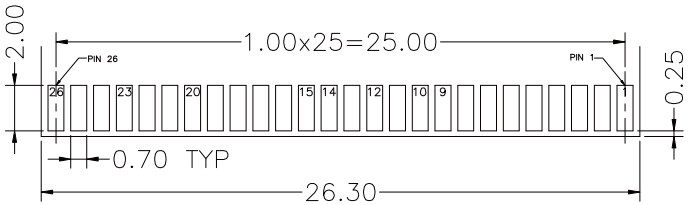

Recommend P.C.B. layout
Tolarances ±0.05mm

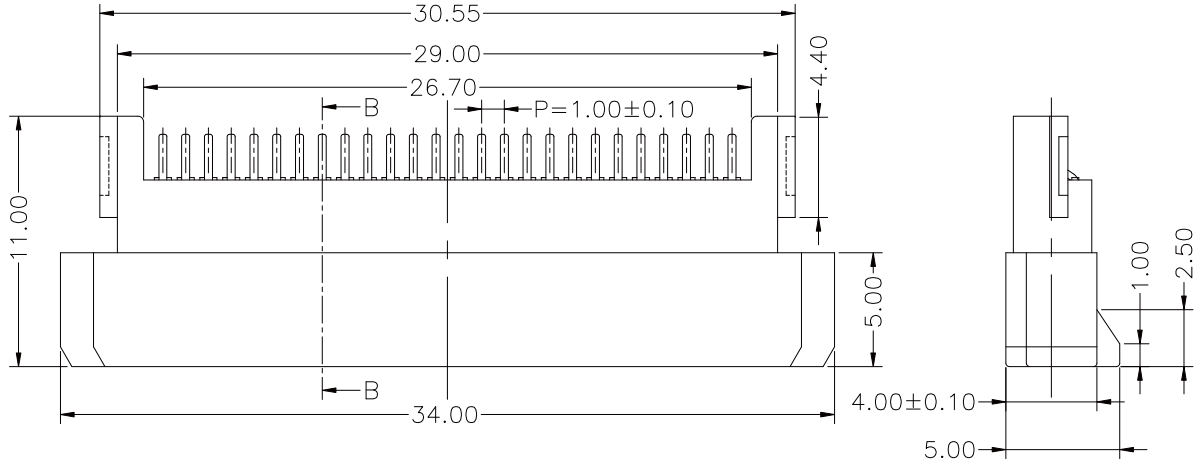

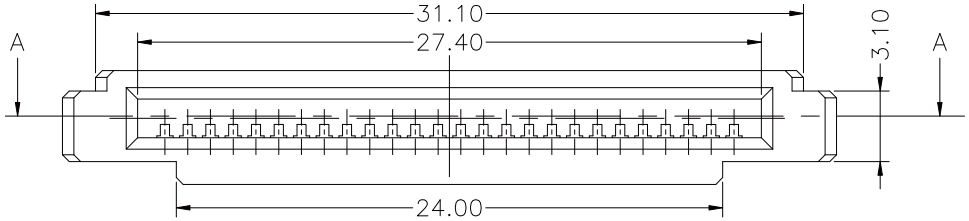

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

PCE-SWxx-26-LF

SERIES
FEMALE 90°SMT
26WAY
LEADFREE
00:A=0.0mm
02:A=0.2mm
04:A=0.4mm
05:A=0.5mm
10:A=1.0mm

DESCRIPTION: Express card connector