


METAL CLIP

PLASTIC POST

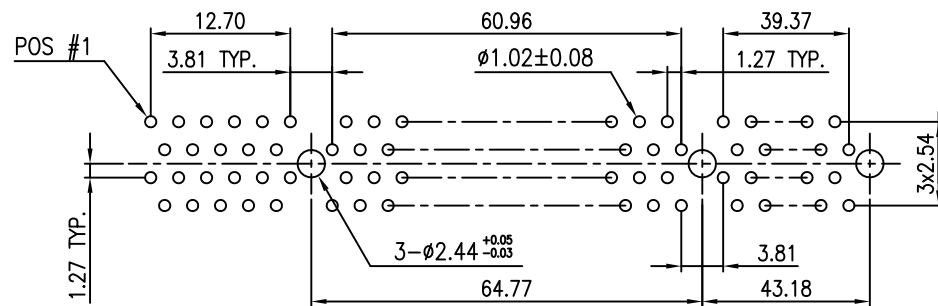

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC,
UL94V-0 RATED.
CONTACT: COPPER ALLOY.
PLATING: MATING AREA- GOLD OVER NICKEL,
SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

MECHANICAL

CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.
INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +85°C.
SOLDERABILITY : 260°C±5°C/10sec±1sec.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1


.XXX±

DATE


ANG±

SIZE A4

PJECTION



ORDER INFORMATION

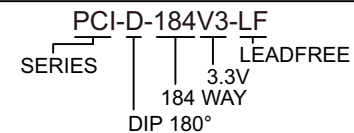

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 64 BIT PCI CARDEDGE, 3.3V