

METAL CLIP


PLASTIC POST

MATERIAL
 INSULATOR: GLASS-REINFORCED THERMOPLASTIC, UL94V-0 RATED.
 CONTACT: COPPER ALLOY.
 PLATING: MATING AREA- GOLD, SOLDER AREA- TIN/LEAD.

ELECTRICAL
 VOLTAGE RATING: 250 VAC RMS.
 CURRENT RATING: 3 AMP.
 INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

MECHANICAL
 CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.
 INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.
 WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL
 TEMPERATURE RANGE: -55° TO +85°.

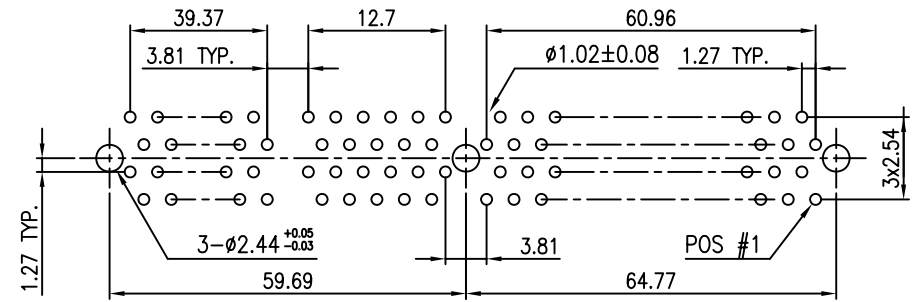


RoHS Compliant

TOLERANCES ARE




DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4

X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

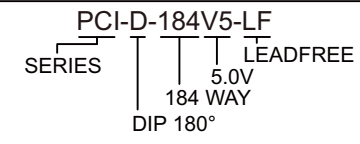

DESCRIPTION: 64 BIT PCI CARDEDGE, 5.0V

煜倫股份有限公司

www.morethanall.com

P PROJECTION