


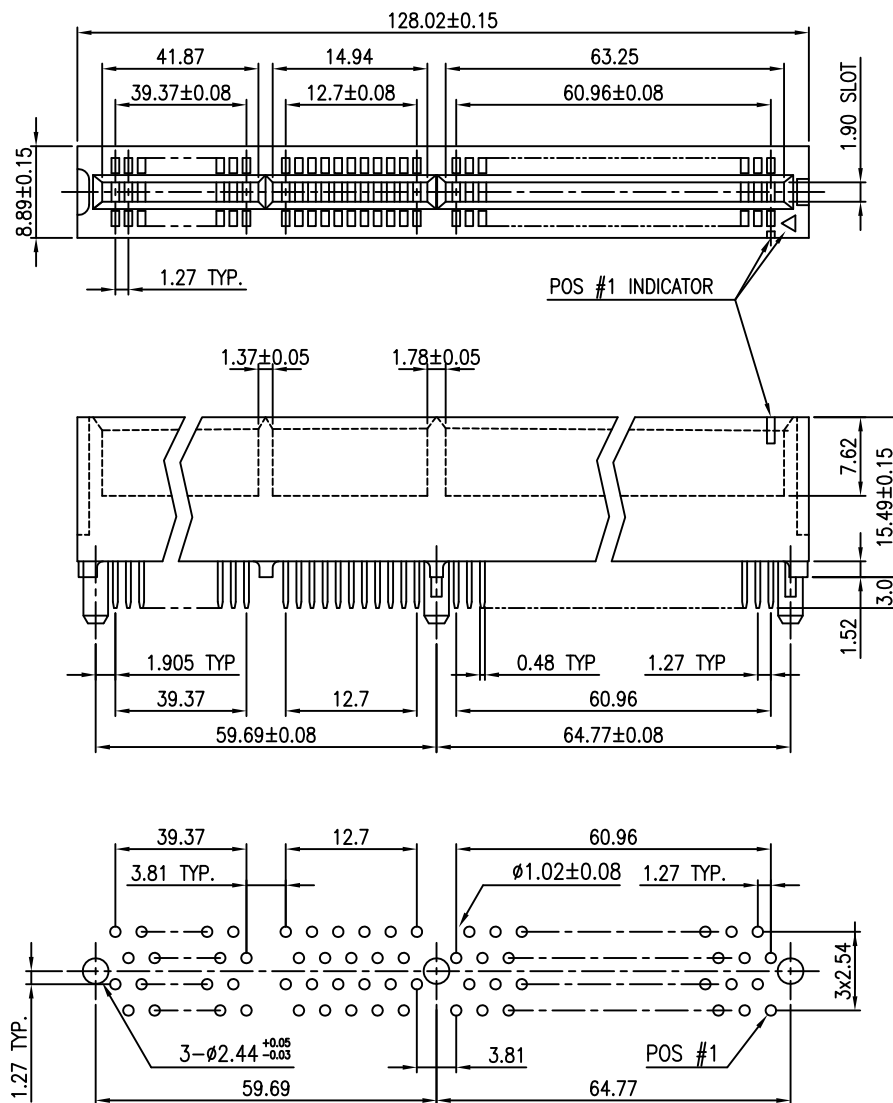

MATERIAL

INSULATOR: GLASS-REINFORCED HIGH THERMOPLASTIC,
NYLON 6T UL94V-0 RATED.

CONTACT: BERYLLIUM COPPER.

PLATING: MATING AREA- GOLD,
SOLDER AREA- TIN.

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 1,000 MEGOHMS MIN.

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

MECHANICAL

CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.

INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +85°.

RECOMMENDED PCB LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ± 0.10

.XX ± 0.05

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCI-DN6TBC-184V5-LF

SERIES
LEADFREE
5.0V
184 WAY
BERYLLIUM COPPER
NYLON 6T
DIP 180°

DESCRIPTION: 64 BIT PCI CARDEDGE, 5.0V