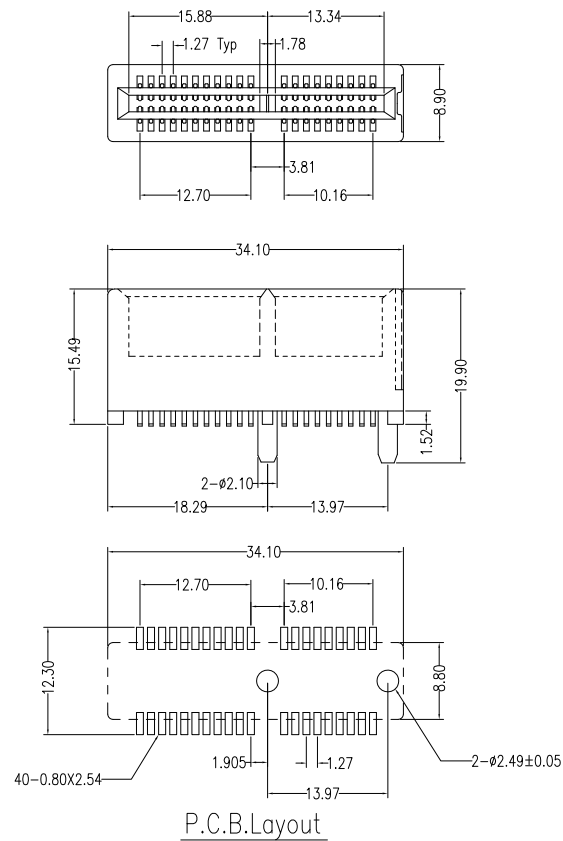


NOTES:

*Material

Body: Polyphenylen Sulfide (PPS), Glass-Reinforced Thermoplastic,
Rated UL 94V-0, Color Brown.

Contacts: Copper Alloy.

Contact Plating: Au plating on contact area;
Sn(100u Min) plating on solder tail;
Ni (40u" Min) underplatin overall

*Mechanical

Contact Normal Force: 75 Grams.

Durability: 100 Cycles.

Insertion Force: 198 Grams.

Withdrawal Force: 28 Grams.

*Electrical Specification

Contact Resistance: 30 Milliohms Max.

Current Rating: 1 Ampere.

Insulation Resistance: 1000 Megohms Min.

Operation Voltage: 125 VAC Max.

Dielectric Withstanding Voltage: 500 VAC One Minute
or 1000 VAC One Seconds.

Operating Temperature: -55°C To +105°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PCI-VP-040-LF
SERIES T LEADFREE
40 WAY
POST
180°SMT

DESCRIPTION: PCI 40 Pin Connector Plastic Posts (SMT)Type