

NOTES

***Material**






Body : NYLON46+30%G.F
 UL 94V-0 Rated.Color: White or Black
 CAV.No: A~H
 Contacts : Brass or Phosphor Bronze
 Plating: Gold plating over Nickel on contact
 Area; Tin/Lead plating on terminal.

***Mechanical:**

Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;

***Electrical Specification**

Contact Resistance : 30 Milliohms Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000 Megohms Min, At 500V AC.
 Operating Temperature : -55°c to +105°c

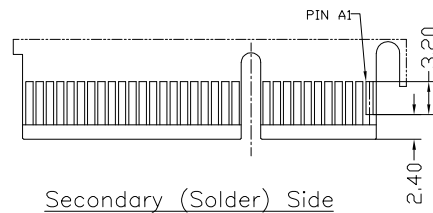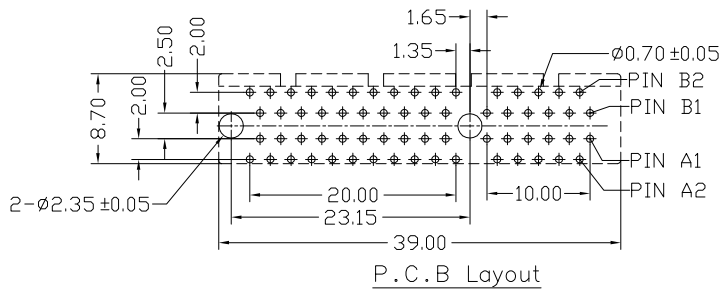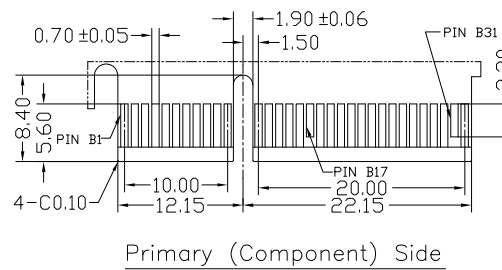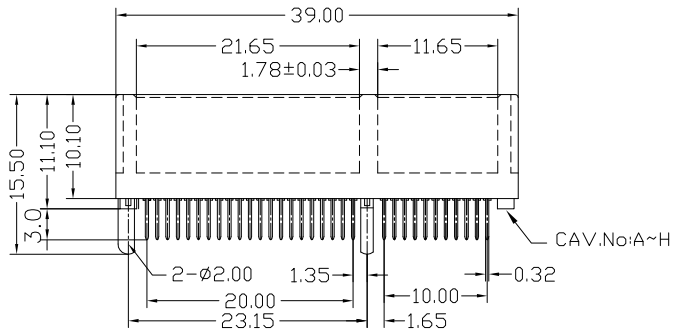

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X.±
 .X±
 .XX±
 .XXX±
 ANG ±

照片框

ORDER INFORMATION

PCIX-D30-064-LF
 SERIES | LEADFREE
 26 WAY
 DIP 3.0mm
 DIP 180°

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: PCI EXPRESS 64Pin Strop Form Pin Plastic Posts (Subtract)