



Primary (Component) Side



Secondary (Solder) Side

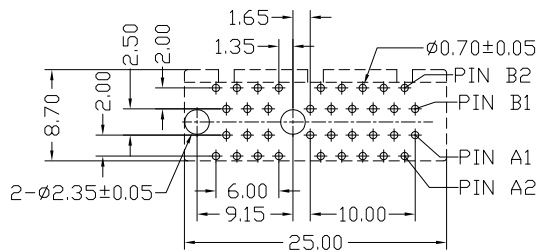

P.C.B Layout

NOTES:

\*Material

Body : NYLON46+30%G.F or PBT+30%G.F,  
UL 94V-0 Rated.Color: White or Black

CAV.No:A~H

Contacts : Brass or Phosphor Bronze

Plating: Gold plating over Nickel on contact  
Area; Tin plating on terminal.

\*Mechanical:

Insertion Force: 1.15N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 4.9N min per contact;

\*Electrical Specification

Contact Resistance : 30 Milliohms Max.

Current Resistance : 1.1 Ampere

Insulation Resistance : 1000 Megohms Min, At 500V AC.

Operating Temperature : -55°C to +105°C

PCIX-D30S30NL-036-LF  
LEADFREE  
NL:NYLON-46  
S30:SEMI/GOLD/30u"  
DIP:3.0mm  
RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. PCIX-D30S30NL-036

DWG NO. PCIX-D30S30NL-036

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

X. ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ± 0.20  
ANG

DESCRIPTION:


PCI EXPRESS 36Pin Strop Form Pin  
Plastic Posts (Subtract)

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

DATE