

NOTES

***Material**



Body : NYLON46+30%G.F
 UL 94V-0 Rated.Color: White or Black
 CAV.No: A~H
 Contacts : Brass or Phosphor Bronze
 Plating: Gold plating over Nickel on contact
 Area; Tin/Lead plating on terminal.

***Mechanical:**


Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;

***Electrical Specification**


Contact Resistance : 30 Milliohms Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000 Megohms Min, At 500V AC.
 Operating Temperature : -55°c to +105°c

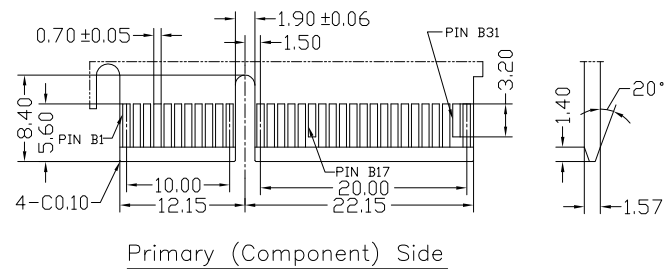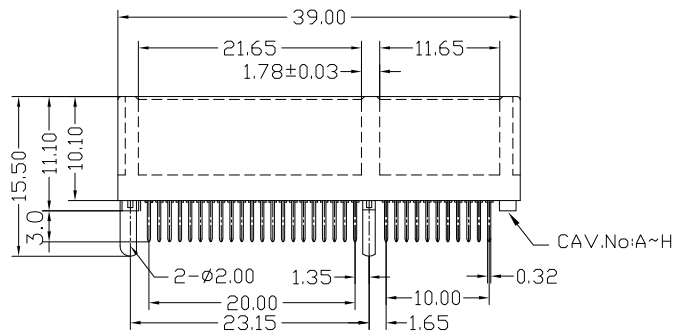


Primary (Component) Side

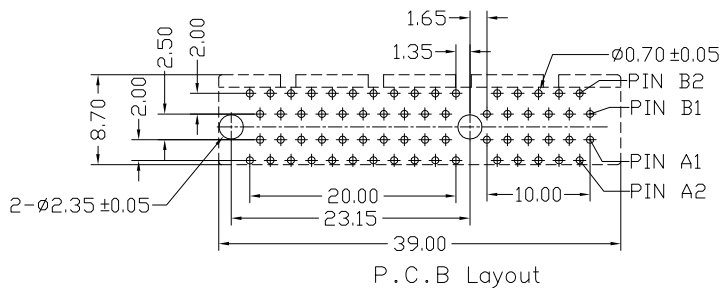

P.C.B Layout

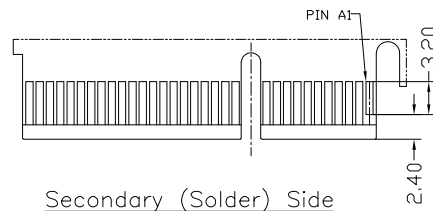

Secondary (Solder) Side

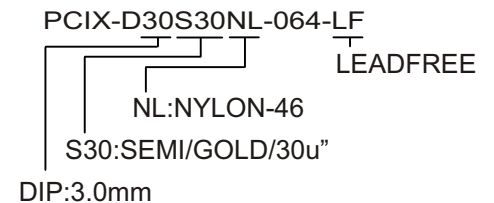

DIP:3.0mm

RoHS Compliant

	PART NO. PCIX-D30S30-NL-064		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: PCI EXPRESS 64Pin Strop Form Pin Plastic Posts (Subtract)
	DWG NO. PCIX-D30S30-NL-064			
焯倫股份有限公司	FILE NO.		DRAWING BY	AREA REVISIONS HK DATE
	UNIT / mm	SCALE 1:1	PROJECTION	