





PIN數	A	B	C	D
20	11.00	9.00	15.00	12.60
26	14.00	12.00	18.00	15.60
80	41.00	39.00	45.00	42.60
96	49.00	47.00	53.00	50.60

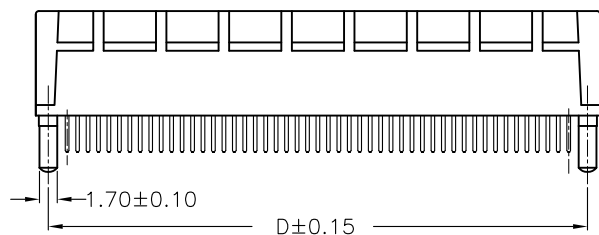


SECTION: A-A

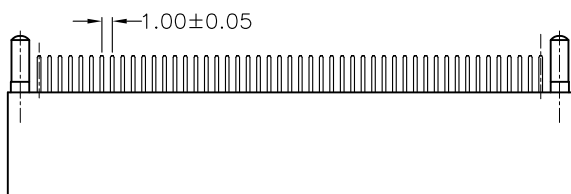

Note:

- 1:Electical Performance
  - 1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.
  - 1.2.Contadt Resistance:30mΩ Max
  - 1.3.insulation Resistance:1000MΩ Min
  - 1.4.Current Rating:1.1A
- 2.Mechanical Performance.
  - 2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.
  - 2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.
  - 2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.
- 3.Material & Finish:
  - 3.1.Housing: NY-66(UL-94V-0), Black.
  - 3.2.Contact Plating: Tin Plating At Solder Tail Area; Gold Plating At Mating Area, All Over Nickel Plating.
- 4.Environmental:Operating Temperature: -55°C~+85°C

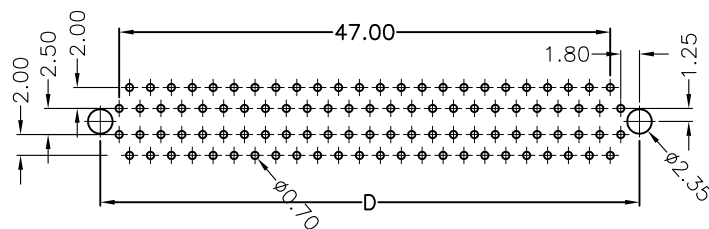

PCB LAYOUT

PCIX-DP-Axxx-LF  
LEADFREE  
020~096WAY  
RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. PCIX-DP-Axxx

DWG NO. PCIX-DP-Axxx

CHECKED BY CY

TOLERANCES ARE

X. ±  
.X ± 0.20  
.XX ± 0.10  
.XXX ± 0.001  
ANG

DESCRIPTION:

FILE NO.

DRAWING BY

AREA

REVISIONS

DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

