
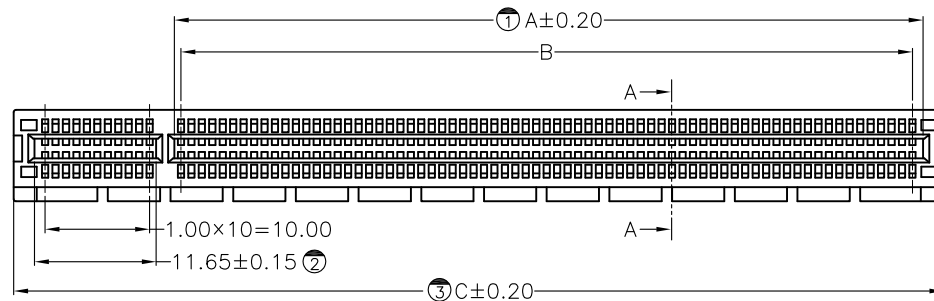



PCB LAYOUT

PIN數	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

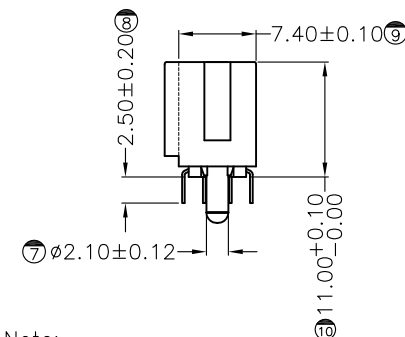

SECTION: A-A

Note:

1:Electical Performance

1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.

1.2.Contadt Resistance:30mΩ Max

1.3.Insulation Resistance:1000MΩ Min

1.4.Current Rating:1.1A

2.Mechanical Performance.

2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.

2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.

2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.

3.Material & Finish:

3.1.Housing: NY-66(UL-94V-0), Black.

3.2.Contact Plating: Tin Plating At Solder Tail Area;

Gold Plating At Mating Area, All Over Nickel Plating.

4.Environmental:Operating Temperature: -55°C~+85°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ± 0.20

.XX ± 0.10

.XXX ± 0.01

ANG ± 3°

PPOJECTION



ORDER INFORMATION

PCIX-DP-xxx-LF



SERIES LEADFREE

036~164WAY



POST

DIP 180°

DESCRIPTION:

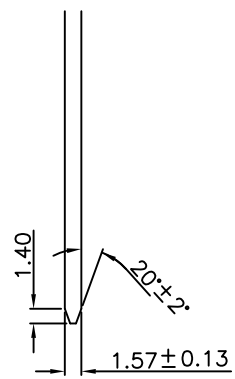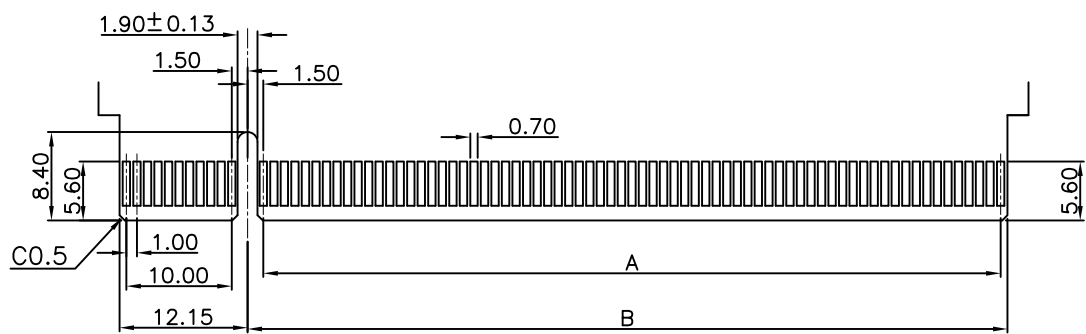

PIN數	A	B		
36	6	8.15		
64	20	22.15		
98	37	39.15		
164	70	72.15		

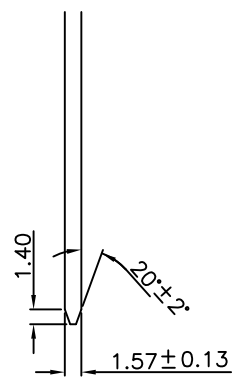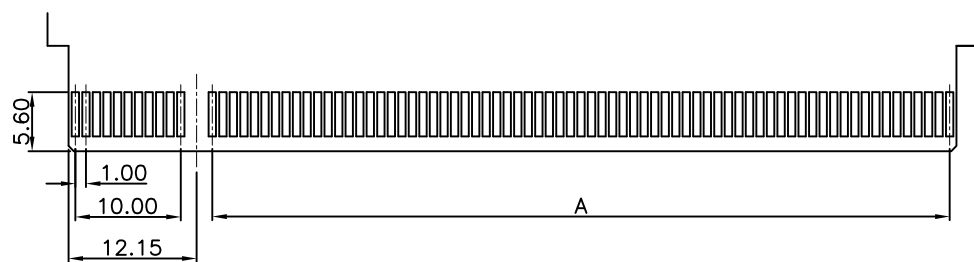

使用測試插板板厚為1.6mm
插入深度為槽深7.6mm