


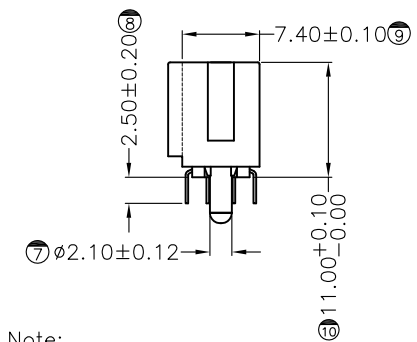
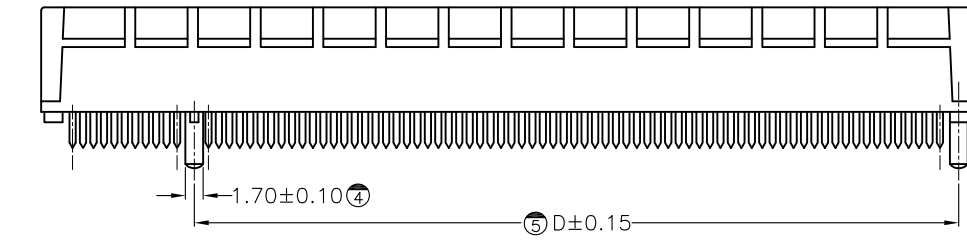


PIN數	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

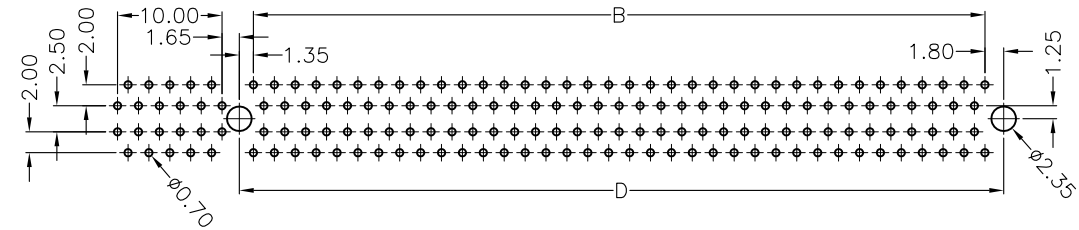

SECTION: A-A

- Note:
- Electrical Performance
 - Dielectric Withstanding Voltage: 500V/AC For 1.0 Minute.
 - Contact Resistance: 30mΩ Max
 - Insulation Resistance: 1000MΩ Min
 - Current Rating: 1.1A
 - Mechanical Performance.
 - CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.
 - CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.
 - Terminal Retention Force (in housing): 0.5Kg Minper Terminal.
 - Material & Finish:
 - Housing: NY-66(UL-94V-0), Black.
 - Contact Plating: Tin Plating At Solder Tail Area; 15" Gold At Mating Area, All Over Nickel Plating.
 - Environmental: Operating Temperature: -55°C~+85°C

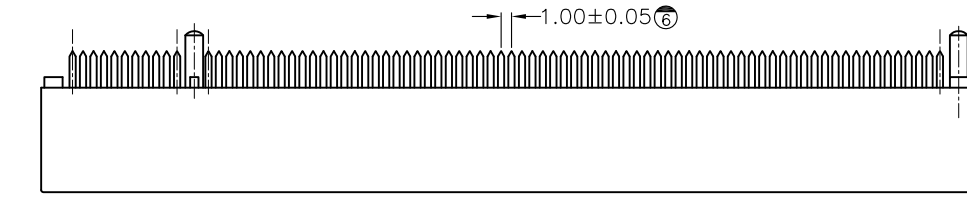

PCB LAYOUT

PCIX-DS15-xxx-LF
LEADFREE
 036:36WAY
 164:164WAY
 S15:SEMI/GOLD/15u"
 RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

焯倫股份有限公司

PART NO. PCIX-DS15-xxx		CHECKED BY CY	TOLERANCES ARE X ± .X ± 0.2 .XX ± 0.1 .XXX ± 0.01 ANG	DESCRIPTION: PCI PH:1.0 15u" NY-66 成品	AREA	REVISIONS	DATE
DWG NO. PCIX-DS15-xxx							
FILE NO.		PROJECTION					
UNIT / mm	SCALE 1:1						