



Primary (Component) Side

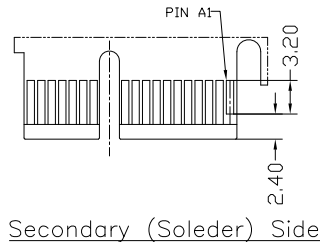

Secondary (Solder) Side

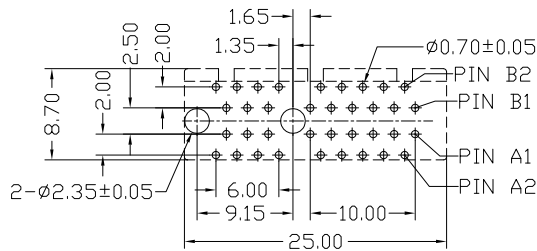

P.C.B Layout

NOTES:

\*Material

Body : NYLON46+30%G.F or PBT+30%G.F,  
 UL 94V-0 Rated. Color: White or Black  
 CAV.No:A~H  
 Contacts : Brass or Phosphor Bronze  
 Plating: Gold plating over Nickel on contact  
 Area; Tin plating on terminal.

\*Mechanical:

Insertion Force: 1.15N max per contact pair;  
 Withdrawal Force: 0.15N min per contact pair;  
 Contact Retention Force: 4.9N min per contact;

\*Electrical Specification

Contact Resistance : 30 Milliohms Max.  
 Current Resistance : 1.1 Ampere  
 Insulation Resistance : 1000 Megohms Min, At 500V AC.  
 Operating Temperature : -55°C to +105°C

PCIX-DS15N46-036-LF  
 LEADFREE  
 N46:NYLON-46  
 S15:SEMI/GOLD/15u"

RoHS Compliant

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

焯倫股份有限公司

PART NO. PCIX-DS15N46-036

DWG NO. PCIX-DS15N46-036

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.20  
 ANG

DESCRIPTION:	PCI EXPRESS 36Pin Strop Form Pin Plastic Posts (Subtract)		
	AREA	REVISIONS	DATE