

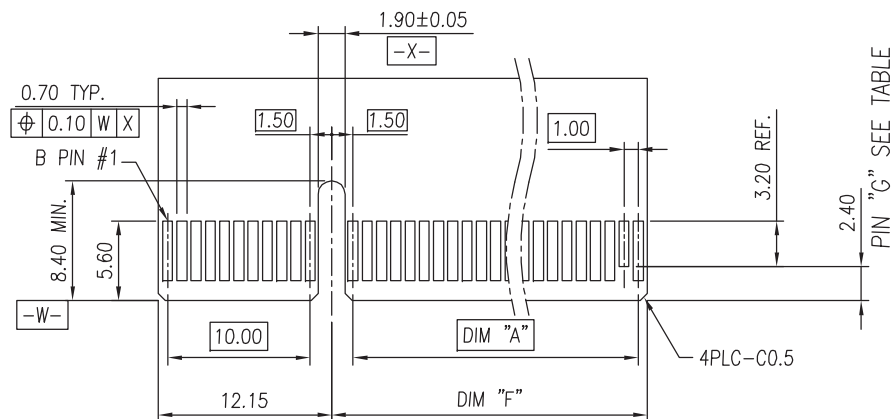


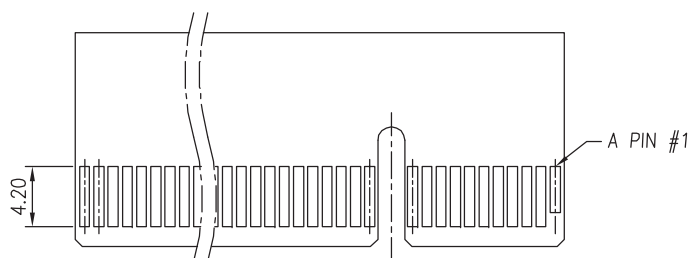


I/O PANEL DIRECTION
PRIMARY (COMPONENT) SIDE

DIMENSIONS				
POSITION	A	C	F ±0.20	G
36	6	9.15	8.15	B PIN#17
64	20	23.15	22.15	B PIN#31
98	37	40.15	39.15	B PIN#48
164	70	73.15	72.15	B PIN#81

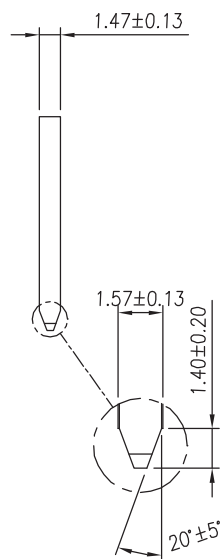

I/O PANEL DIRECTION
SECONDARY (SOLDER) SIDE
ADD-IN CARD EDGE-FINGER DIMENSIONS

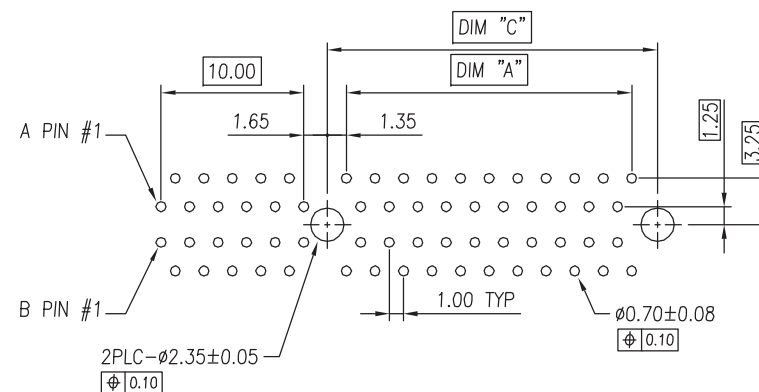

RECOMMENDED PCB LAYOUT
POST TYPE & CLIP TYPE

TOLERANCE: ±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PCIX-DZBxx-xxx-LF




SERIES

LEADFREE
036~164 WAY


B15:PCB THICKNESS 1.56
B23:PCB THICKNESS 2.36

CLIP
DIP 180°

DESCRIPTION: PCI EXPRESS 1.0mm CARD EDGE ASSY

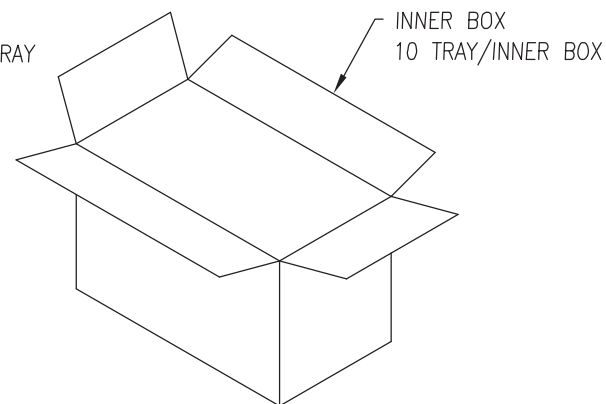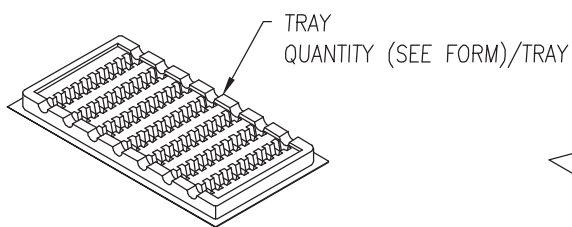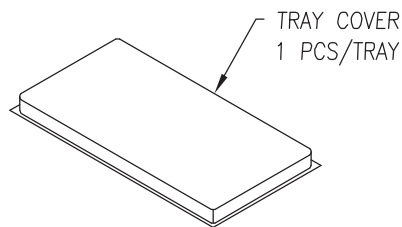

Form				
	36P	64P	98P	164P
TRAY	70 Pcs	60 Pcs	40 Pcs	30 Pcs
INNER BOX	700 Pcs	600 Pcs	400 Pcs	300 Pcs
CARTON	2100 Pcs	1800 Pcs	1200 Pcs	900 Pcs
NET WEIGHT	5.6 Kg	7.3 Kg	7.0 Kg	8.2 Kg
GROSS WEIGHT	7.6 Kg	9.3 Kg	9.0 Kg	10.2 Kg

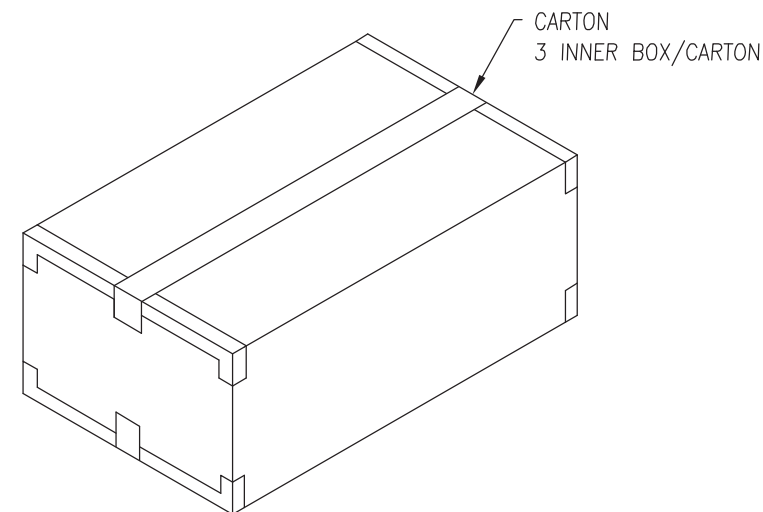

SHIPPING CARTON

NOTES:

1. TRAY COVER SIZE: 329.5mm(L)X 170mm(W)X 20mm(H).
2. TRAY SIZE: 328.5mm(L)X 169mm(W)X 20mm(H).
3. INNER BOX SIZE: 340mm(L)X 187mm(W)X 210mm(H).
4. CARTON SIZE: 576mm(L)X 350mm(W)X 232mm(H).

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PCIX-DZBxx-xxx-LF

SERIES

CLIP

DIP 180°

LEADFREE
036~164 WAY

B15:PCB THICKNESS 1.56
B23:PCB THICKNESS 2.36

DESCRIPTION: PCI EXPRESS 1.0mm CARD EDGE ASSY