
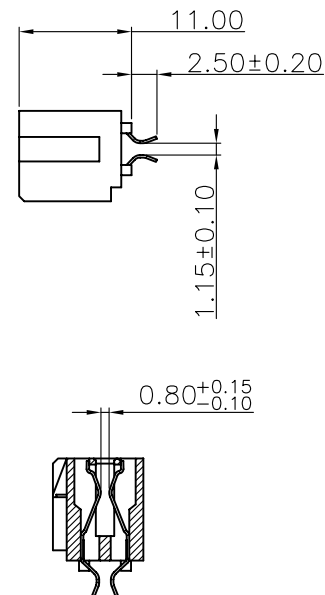


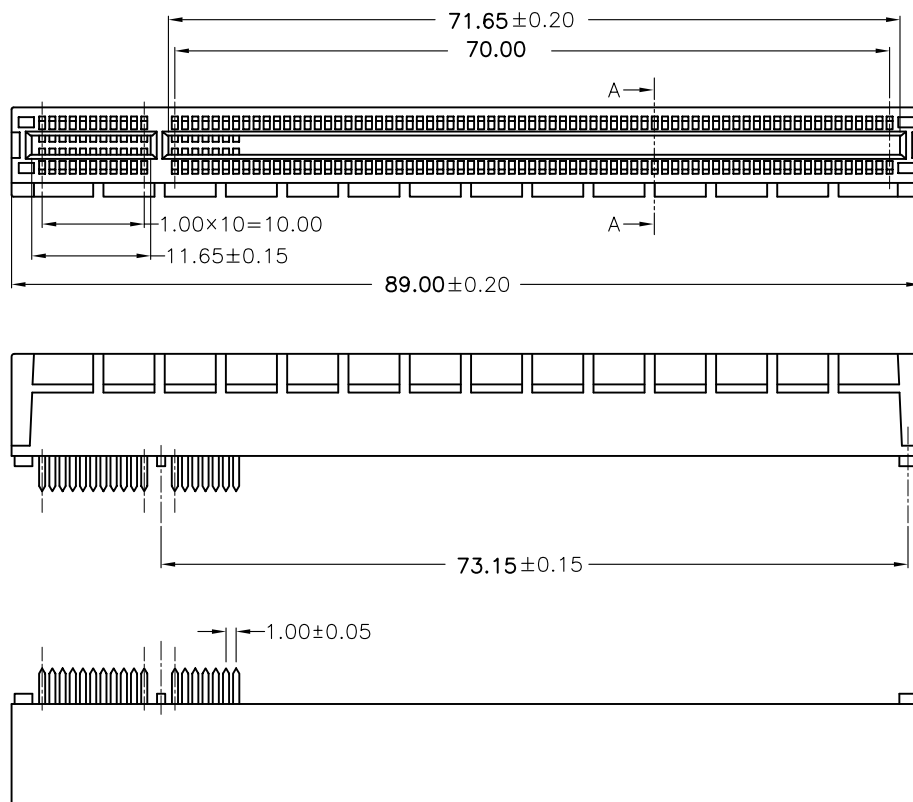

SECTION:A-A

Note:

- 1:Electical Performance
 - 1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.
 - 1.2.Contadt Resistance:30m? Max
 - 1.3.linsulation Resistance:1000M? Min
- 2.Mechanical Performance.
 - 2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.
 - 2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.
 - 2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.
- 3.Material & Finish:
 - 3.1.Housing: Glass Filled High Temperatuer Nylon, Black.
 - 3.2.Contact Plating: Tin/Lead Plating At Solder Tail Area;
Gold Plating At Mating Area, All Over Nickel Plating.
- 4.Environmental:Operating Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PCIX-E-16436L-LF
SERIES LEADFREE
LEFT 36WAY
164WAY
EDGE CLIP

DESCRIPTION: