

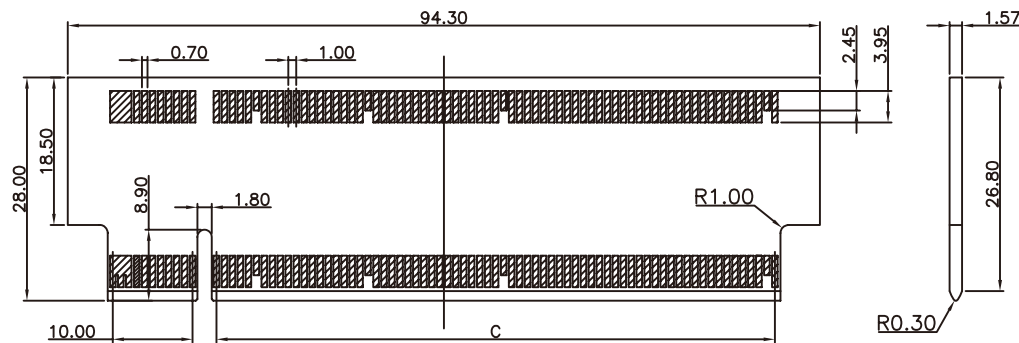

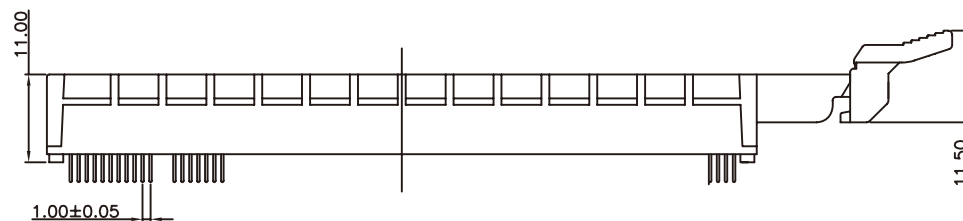



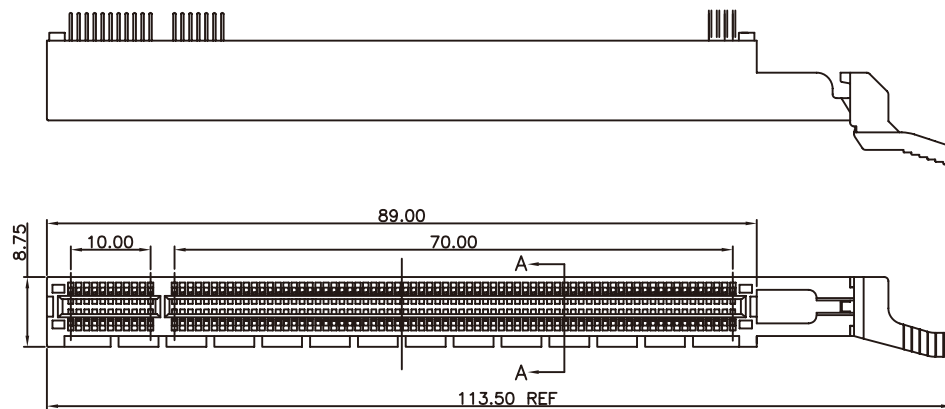

RECOMMENDED MODULE LAYOUT



NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC(NYLON+GF)
CONTACT:BRASS
PLATING:
CONTACT: GOLD PLATING
SPECIFICATION:
VOLTAGE RATING: 50V
CURRENT RATING: 1.1A
CONTACT RESISTANCE TERMINAL:20m Ω MAX
DIELECTRIC WITHSTANDING VOLTAGE:500V AC
INSULATION RESISTANCE:1000M Ω MIN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PCIX-E-16436L8R-LF

SERIES | LEADFREE
RIGHT 8 WAY
LEFT 36WAY
164WAY
EDGE CLIP

DESCRIPTION: PCI 1.0 164Y旋轉夾板 式成品