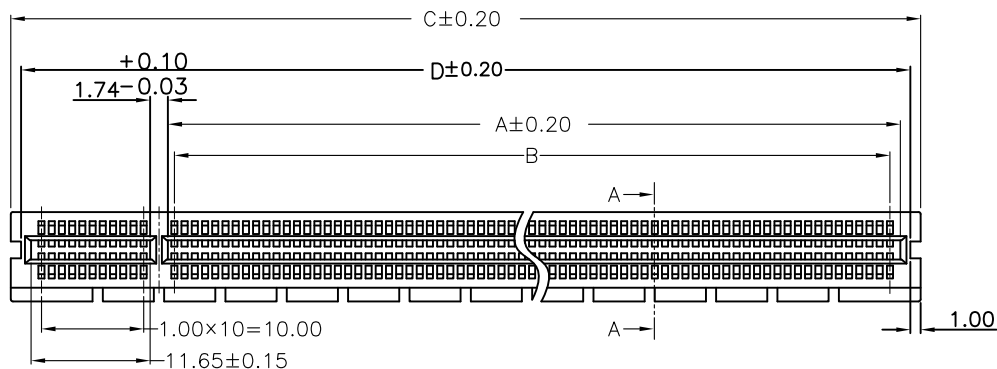


SECTION:A-A

PIN數	A	B	C	D
36	7.65	6.00	25.00	23.00
64	21.65	20.00	39.00	37.00
98	38.65	37.00	56.00	54.00
164	71.65	70.00	89.00	87.00

Note:

1:Electvical Performance

1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.

1.2.Contadt Resistance:30mΩ Max

1.3.insulation Resistance:1000MΩ Min

2.Mechanical Performance.

2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.

2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.

2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.

3.Material & Finish:

3.1.Housing: Glass Filled High Temperatuer Nylon, Black.

3.2.Contact Plating: Tin Plating At Solder Tail Area;

Gold Plating At Mating Area, All Over Nickel Plating.

4.Environmental:Operating Temperature: -55°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.001

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCIX-EF1-xxx-LF

SERIES

LEADFREE

036~164WAY

FLANGE

EDGE CLIP

DESCRIPTION: