

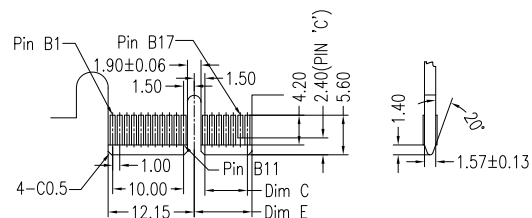






	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	DIM 'E'	Pin 'C'
64P	21.65	39.00	20.00	26.30	22.15	A1,B17,B31
98P	38.65	56.00	37.00	43.30	39.15	A1,B17,B31,B48
164P	71.65	89.00	70.00	76.30	72.15	A1,B17,B31,B48,B81

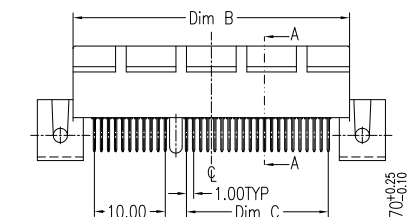

I/O Panel direction
Primary (Component) Side

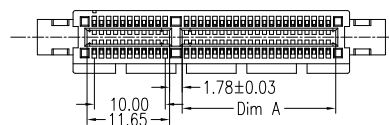

I/O Panel direction
Secondary (solder) Side

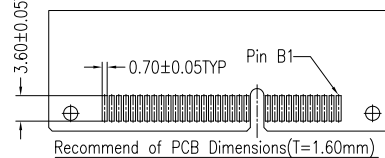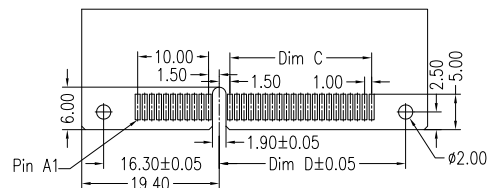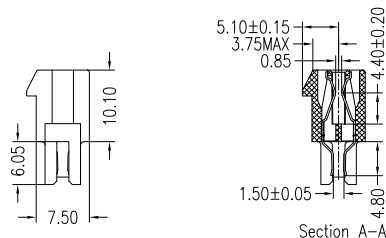

NOTES:

*Material

Body: Nylon9T, UL 94V-0 Rated.

Contacts: Brass

Plating: Au plating on contact area,
Sn (100u" Min.) plating on solder tail,
Ni (40u" Min.) underplating overall.

*Mechanical

Insertion Force: 1.15N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 3.43N min per contact;

*Electrical Specification

Contact Resistance : 30 mΩ Max.

Current Resistance : 1 Ampere

Insulation Resistance : 1000 MΩ Min, At 500V AC.

*Environmental

Operating Temperature : -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.35

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.15

ANG ± 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PCIX-EF2-xxx-LF

SERIES

LEADFREE

064~164WAY

FLANGE

EDGE CLIP

DESCRIPTION: PCI Express Connector Strip Form Pin Straddle(With Flange type)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com