


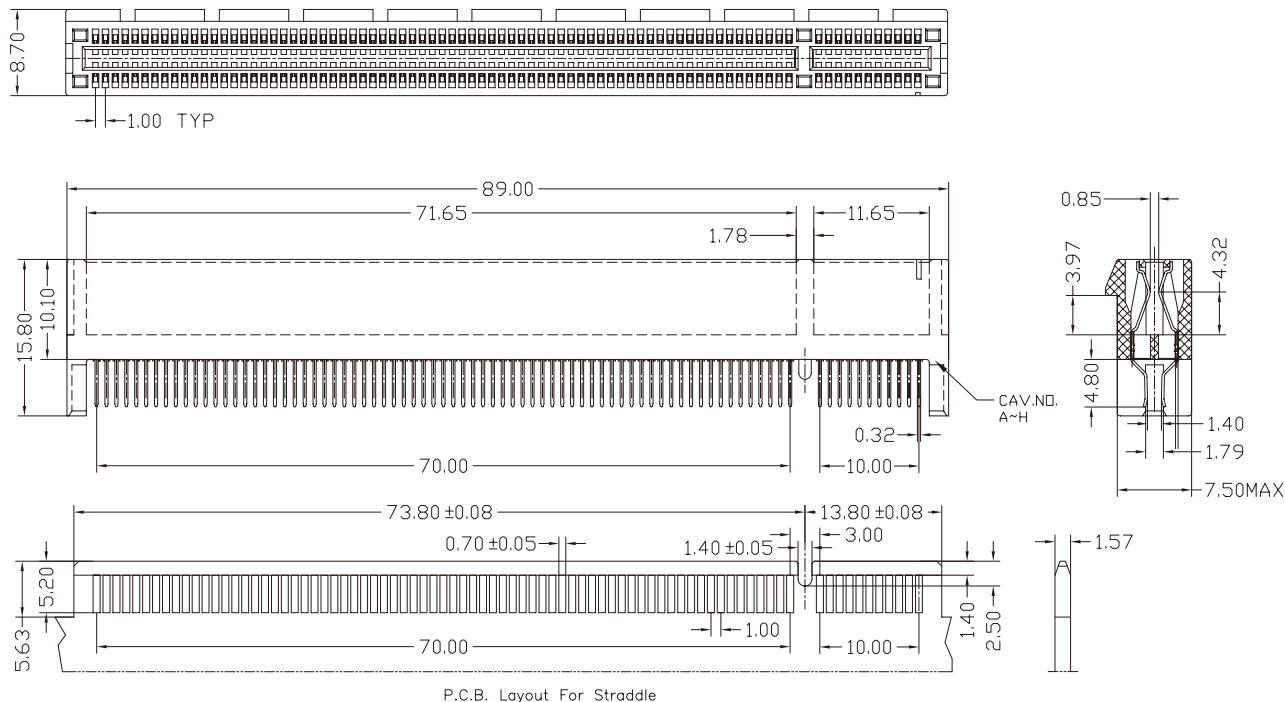

## NOTES:

### \*Material

Body : Nylon6T or Nylon9T, UL 94V-0 Rated.

Color: White or Black.

Contacts: Brass or Phosphor Bronze.

Plating: Gold plating over Nickel on contact area;

Tin Plating On Solder Tail.

CAV.NO.:A~H.

### \*Mechanical:

Insertion Force: 1.15N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 4.9N min per contact;



### \*Electrical Specification

Contact Resistance : 30 Milliohms Max.

Current Resistance : 1.1 Ampere

Insulation Resistance : 1000 Megohms Min, At 500V AC.

Operating Temperature : -55°C to +105°C

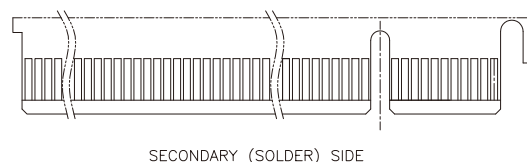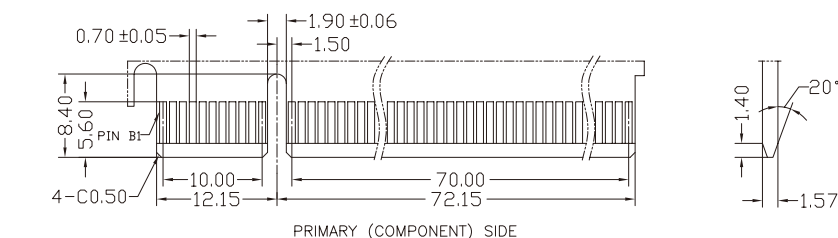

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.38

.XX ± 0.25

.XXX ± 0.20

ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

PCIX-EG-164-LF

SERIES

LEADFREE

164WAY

GOLD FLASH

EDGE CLIP

DESCRIPTION: PCI Express Connector 164 Pin Strip Form Pin Straddle(Groove)