
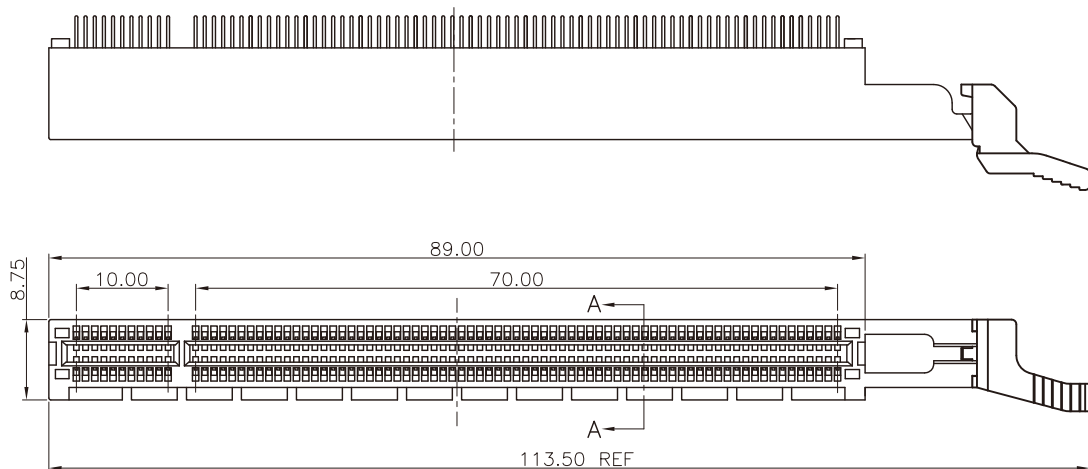



NOTE:
 MATERIAL:
 HOUSING: THERMOPLASTIC (NYLON+GF)
 CONTACT: BRASS
 PLATING:
 CONTACT: GOLD PLATING
 SPECIFICATION:
 VOLTAGE RATING: 50V
 CURRENT RATING: 1.1A
 CONTACT RESISTANCE TERMINAL: 20mΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 INSULATION RESISTANCE: 1000MΩ MIN



SECTION: A-A

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.30
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

PPOJECTION



ORDER INFORMATION

PCIX-ELP-164-LF
 SERIES | LEADFREE
 164WAY
 PUSH LOCK
 EDGE CLIP

DESCRIPTION: