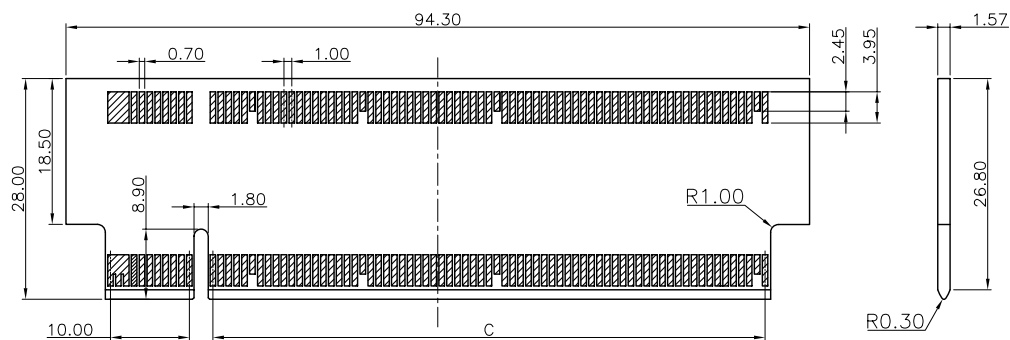

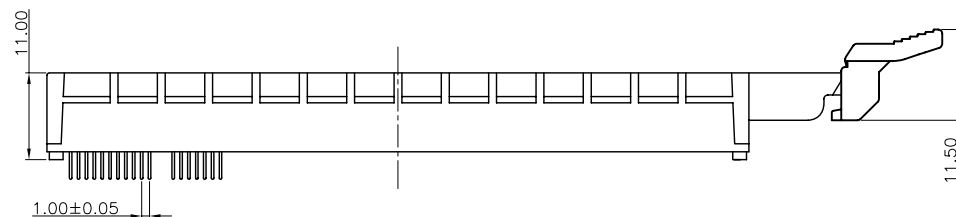

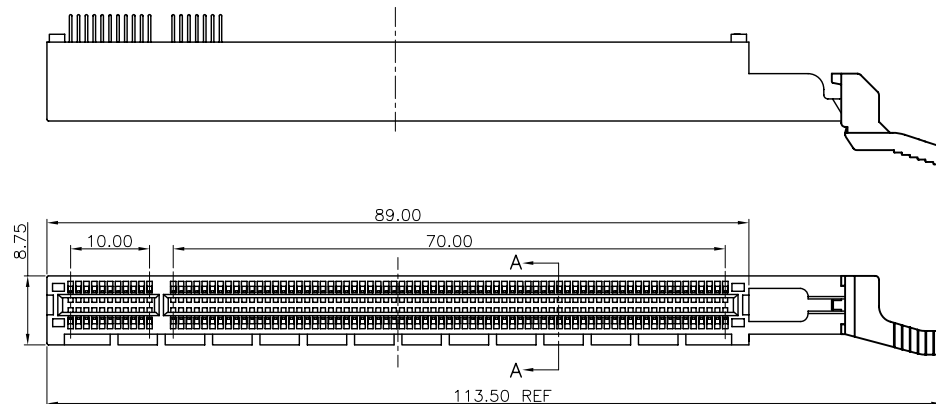


RECOMMENDED MODULE LAYOUT

NOTE:
 MATERIAL:
 HOUSING:THERMOPLASTIC(NYLON+GF)
 CONTACT:BRASS
 PLATING:
 CONTACT: GOLD PLATING
 SPECIFICATION:
 VOLTAGE RATING: 50V
 CURRENT RATING: 1.1A
 CONTACT RESISTANCE TERMINAL:20m Ω MAX
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC
 INSULATION RESISTANCE:1000M Ω MIN

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCIX-ELP-16436L-LF
 SERIES LEADFREE
 LEFT 36WAY
 164WAY
 PUSH LOCK
 EDGE CLIP

DESCRIPTION: PCI 1.0 164PK128