
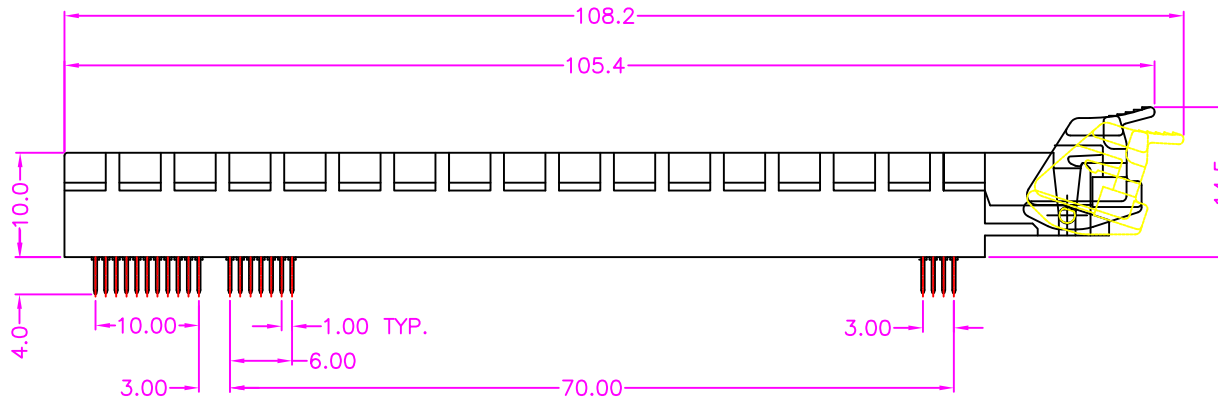



MATERIALS

HOUSING: PA66 (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

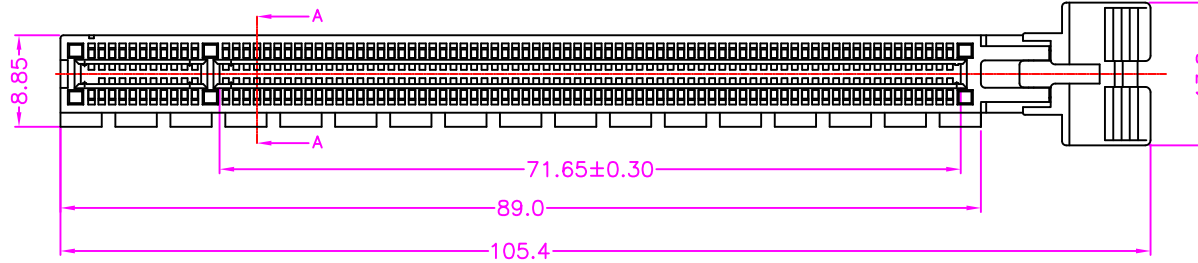

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

照片框

ORDER INFORMATION

PCIX-ELP2-164044-LF
 SERIES | LEADFREE
 | 164P/44C
 | DOUBLE PUSH LOCK
 | EDGE CLIP



煜倫股份有限公司

www.morethanall.com



SIZE A4

PJECTION

DESCRIPTION: PCI EXPRESS, 1.00mm PITCH, PCB MOUNT, STRADDLE TYPE, 1 KEY WITH LATCH, 164PIN, FEMALE

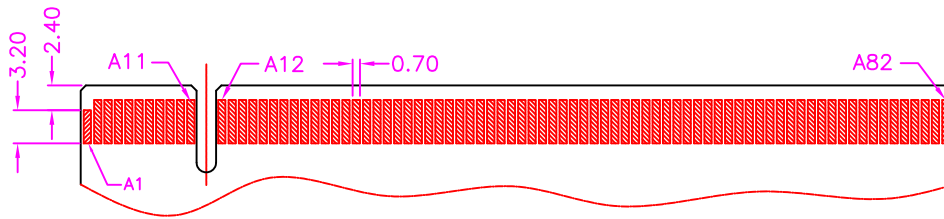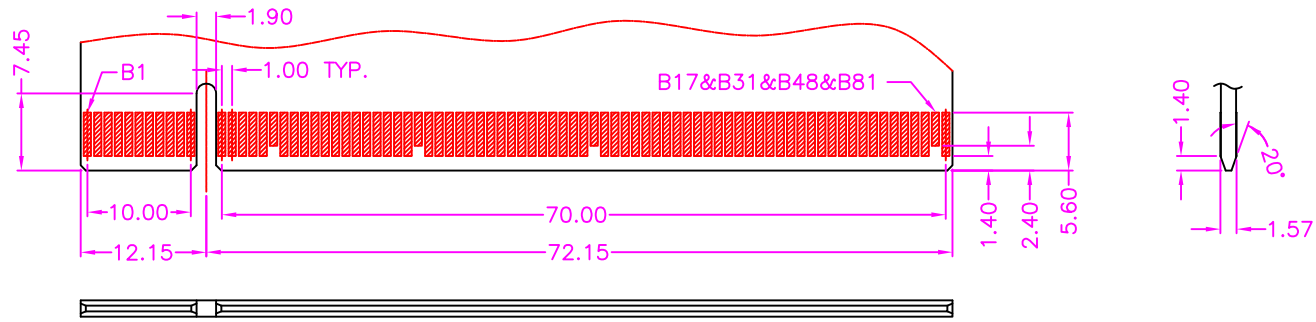

ADD-IN CARD EDGE-FINGER DIMENSIONS

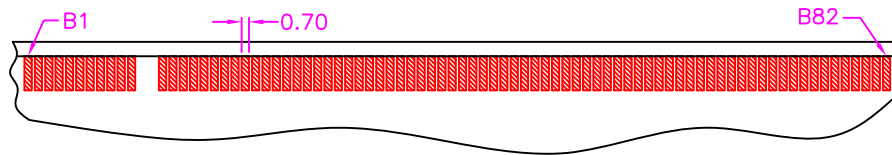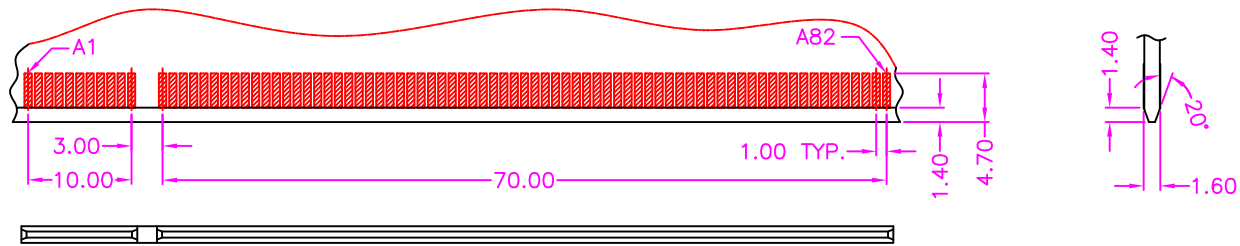

REMMENDED FOOTPRINT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

PCIX-ELP2-164044-LF
SERIES | LEADFREE
164P/44C
DOUBLE PUSH LOCK
EDGE CLIP

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PCI EXPRESS, 1.00mm PITCH, PCB MOUNT, STRADDLE TYPE, 1 KEY WITH LATCH, 164PIN, FEMALE