
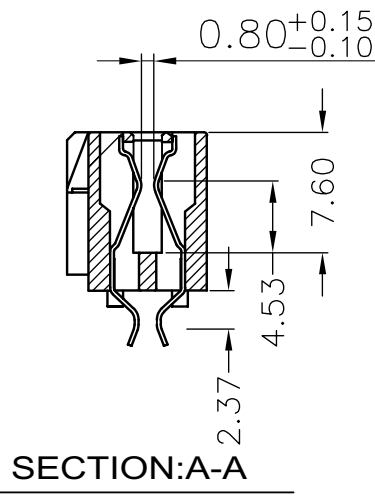
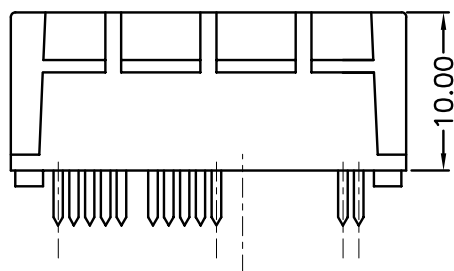
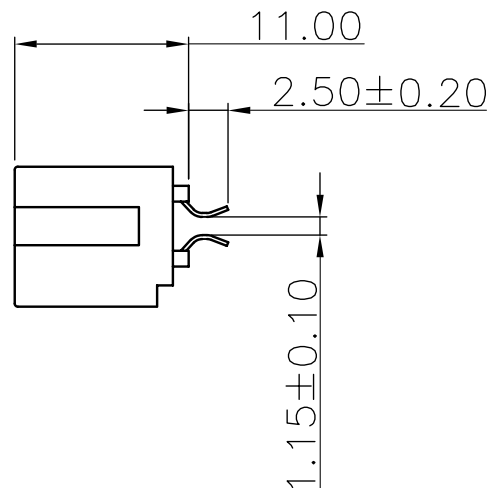


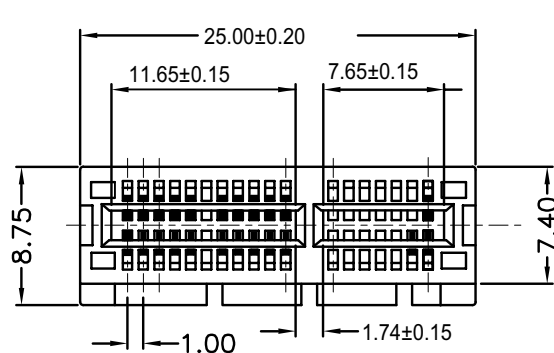

Note:

1:Electical Performance

1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.

1.2.Contadt Resistance:30m Ω Max

1.3.linsulation Resistance:1000MΩ Min

2.Mechanical Performance.

2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.

2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.

2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.

3.Material & Finish:

3.1.Housing: Glass Filled High Temperatuer Nylon 9T, Black.

3.2.Contact Plating: Tin Plating At Solder Tail Area;

Gold Plating At Mating Area, All Over Nickel Plating.

4.Environmental:Operating Temperature: -55°C~+85°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.001
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCIX-EN9T-03623-LF
SERIES
LEADFREE
TOTAL 23 WAY
36 WAY
NYLON 9T
EDGE CLIP

DESCRIPTION: PCI PH:1.0 夾板