



Primary (Component) Side

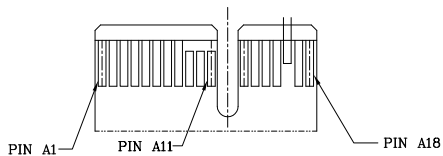


Secondary (Solder) Side

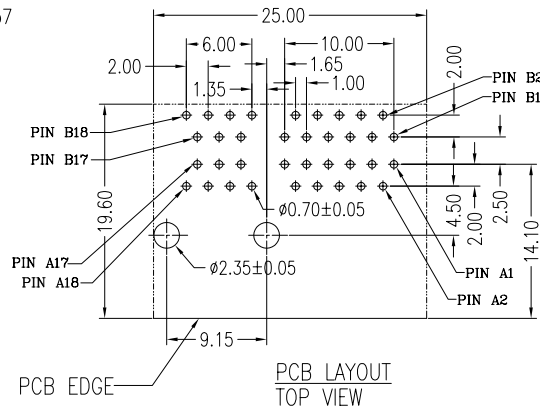

PCB EDGE

PCB LAYOUT TOP VIEW



3D VIEW

NOTES:

***Material**

Housing: Nylon46+30%G.F, UL 94V-0 Rated. Color: Black
 Contact: Brass.
 Plating: Gold plating over Nickel on contact Area; Tin plating on solder tail.

***Mechanical**

Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;

***Electrical Specification**

Contact Resistance : 30 Milliohms Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000 Megohms Min, At 500V AC.

***Environmental**

Operating Temperature : -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

PCIX-R-036-LF
 SERIES | LEADFREE
 | 36 WAY
 | DIP 90°

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com