


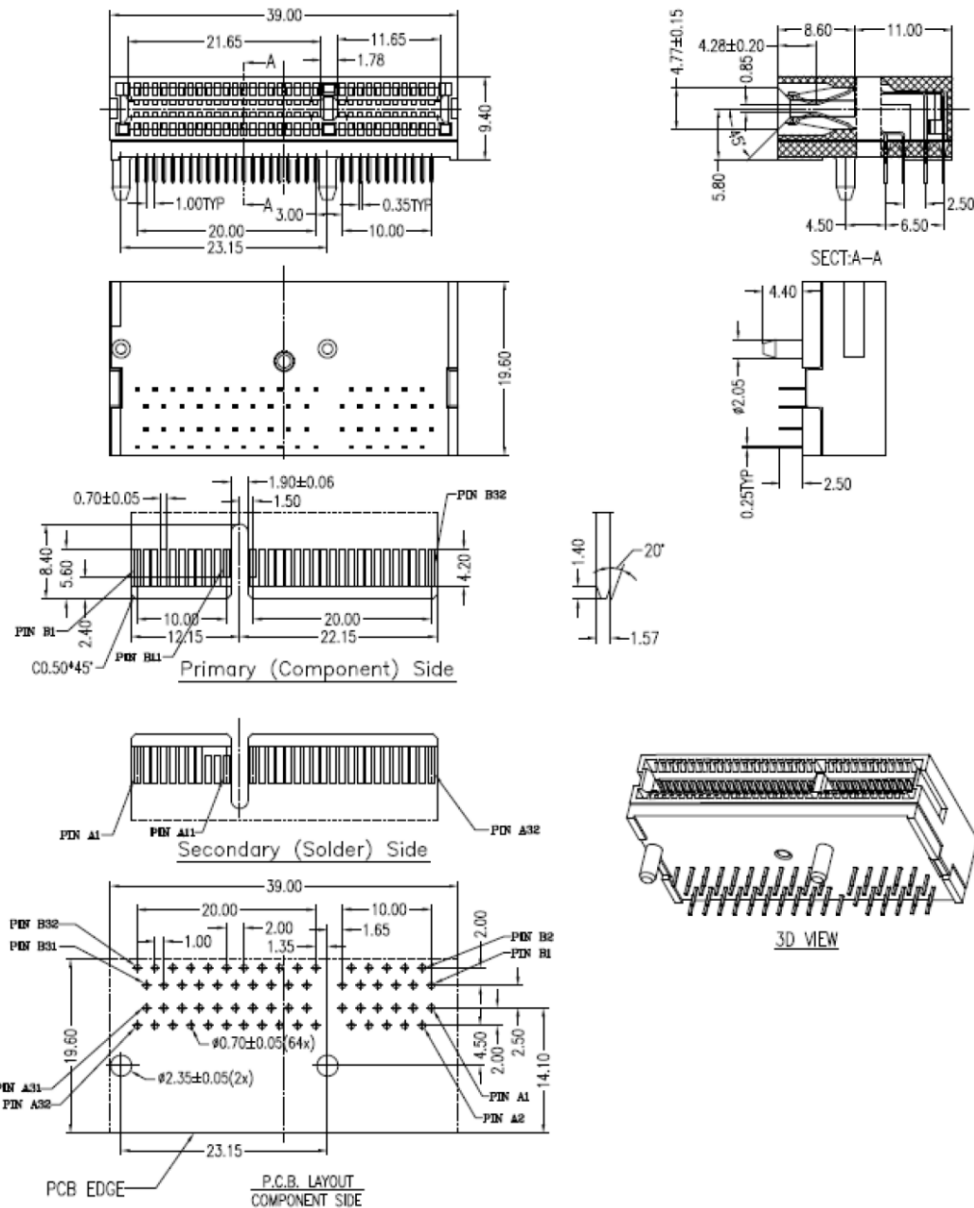

NOTES:

*Material

Housing: Nylon46/LCP, UL 94V-0 Rated.Color: Black
 Contact: Brass
 Plating: Au Plating On Contact Area;
 Sn(100u" Min.) Plating On Solder Tail;
 Ni(40u" Min.) Underplating Overall

*Mechanical

Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;

*Electrical Specification

Contact Resistance : 30mΩ Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000MΩ Min, At 500V AC.

*Environmental

Operating Temperature : -55°C to +105°C

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCIX-R-064-LF

SERIES LEADFREE
 64 WAY
 DIP 90°

DESCRIPTION: