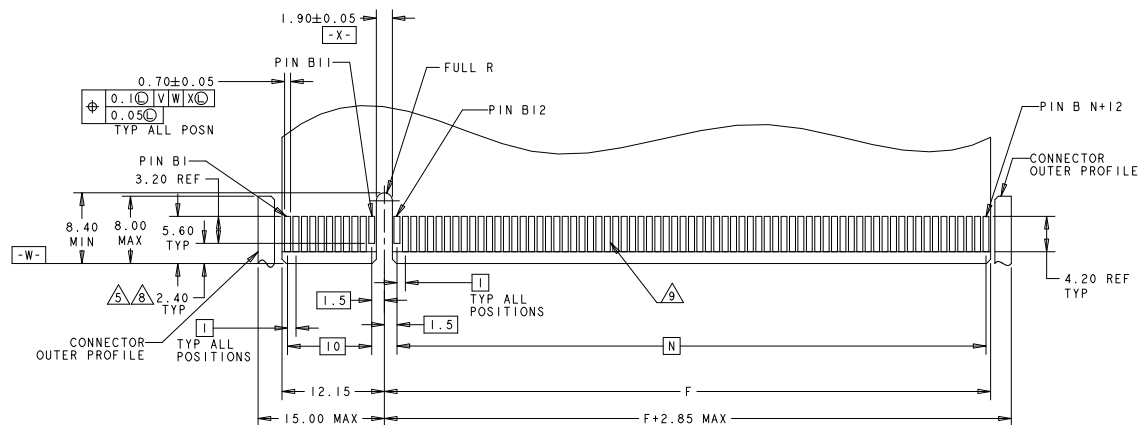


ExpressModule LAYOUT (MATING PART ONLY)

- △ DIMENSION ONLY APPLIES TO "LAST MATE" PINS.
- △ CARD THICKNESS APPLIES ACROSS PAD SURFACES AND INCLUDES PLATING AND/OR METALIZATION.
- △ CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.
- △ NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF "LAST MATE" PADS.
- △ GOLD CONTACT PADS: ELECTROLESS GOLD PLATE 0.76μm MIN THICK OVER ELECTROLESS NICKEL PLATING 2μm MIN THICK.
- 10 PC BOARD SUPPLIER IS RESPONSIBLE FOR MAINTAINING ALL DIMENSIONS OF PC BOARD EDGE.
- △ FLATNESS REQUIREMENT APPLIES FROM EDGE OF PC BOARD TO TOP OF KEY

A1, B17, B31, B48, B81	200	-	
A1, B17, B31, B48, B81	164	16	72.15
A1, B17, B31, B48	98	8	39.15
A1, B17, B31	64	4	22.15
A1, B17	36	1	8.15
LAST MATE PINS	POS.	PORT	F

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.25

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PCIX-R-xxx-LF

SERIES

LEADFREE

036~164WAY

DIP 90°

DESCRIPTION: PCI EXPRESS 1.0mm R/A CONNECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com