
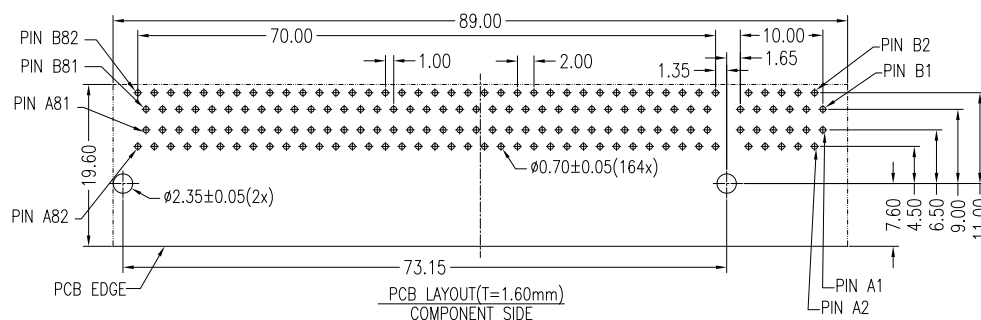
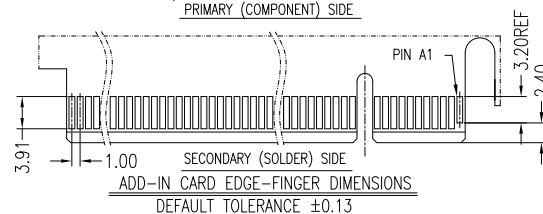
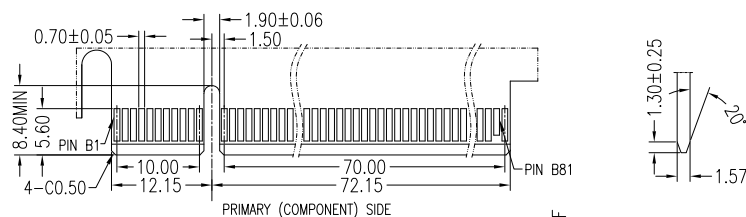




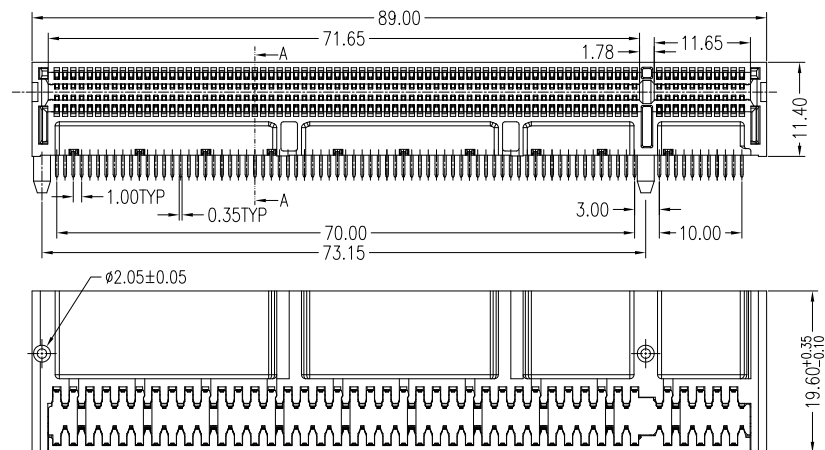

NOTES:

*Material

Housing: LCP, UL 94V-0 Rated. Color: Black.
Contact: Brass.
Plating: Au Plating On Contact Area;
Sn(100u" Min.) Plating On Solder Tail;
Ni(50u" Min.) Underplating Overall

*Mechanical


Insertion Force: 1.15N max per contact pair;
Withdrawal Force: 0.15N min per contact pair;
Contact Retention Force: 3.5N min per contact;
Durability: 50 cycles

*Electrical Specification

Current Rating : 1.1 Ampere
Contact Resistance : 30m Ω Max.
Insulation Resistance : 1000M Ω Min, At 500V AC.

*Environmental

Operating Temperature : -55 $^{\circ}$ c to +105 $^{\circ}$ c



3D VIEW

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG $\pm 3^{\circ}$



ORDER INFORMATION

PCIX-R11-164-LF
SERIES | LEADFREE
164 WAY
HIGH 11.4mm
DIP 90 $^{\circ}$

DESCRIPTION: PCI EXPRESS R/A DIP TYPE (GEN3) 164PIN (Right key)(Add Height)