
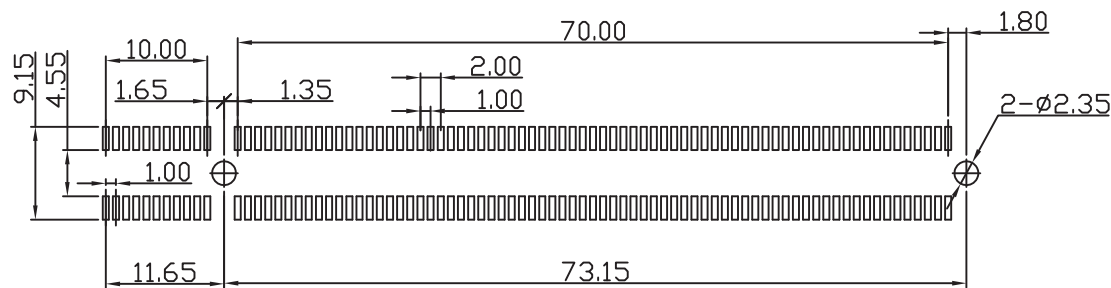



NOTE:
 MATERIAL:
 HOUSING: NY46+GF
 CONTACT: BRASS
 PLATING:
 CONTACT: GOLD PLATING
 SPECIFICATION:
 VOLTAGE RATING: 50V
 CURRENT RATING: 1.1A
 CONTACT RESISTANCE TERMINAL: 20mΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 INSULATION RESISTANCE: 1000MΩ MIN

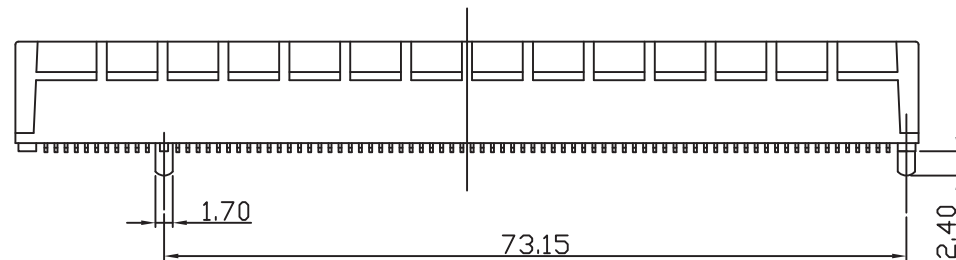

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

PCIX-VP-164-LF
 SERIES | LEADFREE
 164 WAY
 POST
 180°SMT

DESCRIPTION: PCI 164PIN SMT 無耳扣