





Material: *Insulator: Nylon 6T UL 94V-0 (Black)
 *Contact Post: Phosphor bronze, 0.30mm^t, Gold Flash Plated.
 *Solder Tab: Phosphor bronze, 0.15mm^t, Matte Tin Plated.
 Note: RoHS II and Halogen Free Compliance.

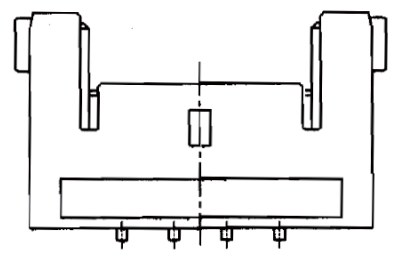

4P

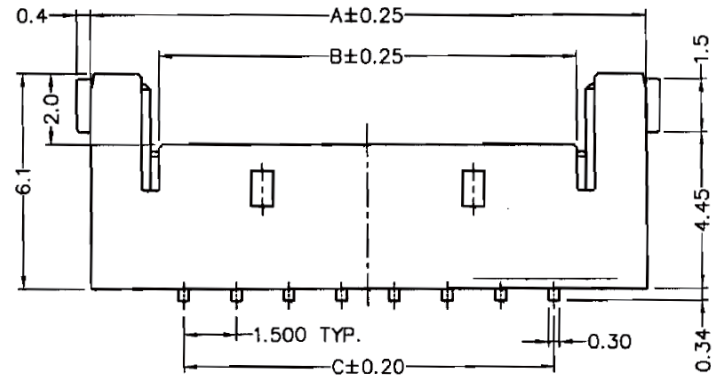

6P~12P

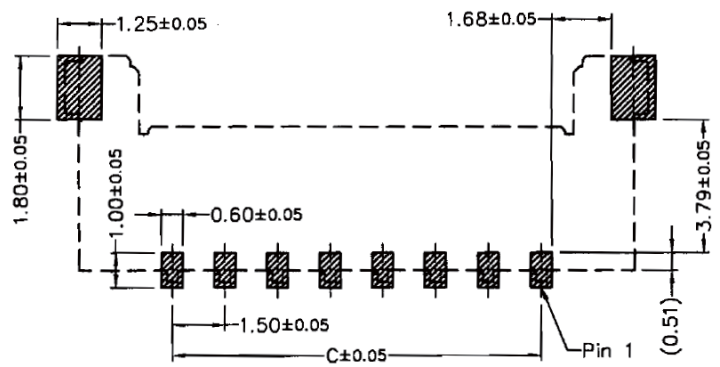

P.C.B LAYOUT

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			Qty/Reel
		A	B	C	
4	PCK-W-04	9.75	5.85	4.50	2000
6	PCK-W-06	12.75	8.85	7.50	2000
8	PCK-W-08	15.75	11.85	10.50	2000
10	PCK-W-10	18.75	14.85	13.50	2000
12	PCK-W-12	21.75	17.85	16.50	2000

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

照片框

ORDER INFORMATION

PCK15-W-xx-LF
 SERIES | LEADFREE
 04~12WAY
 90°SMT

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com