

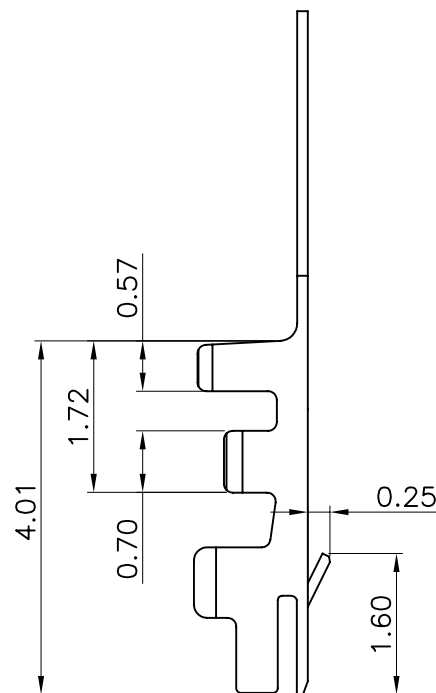
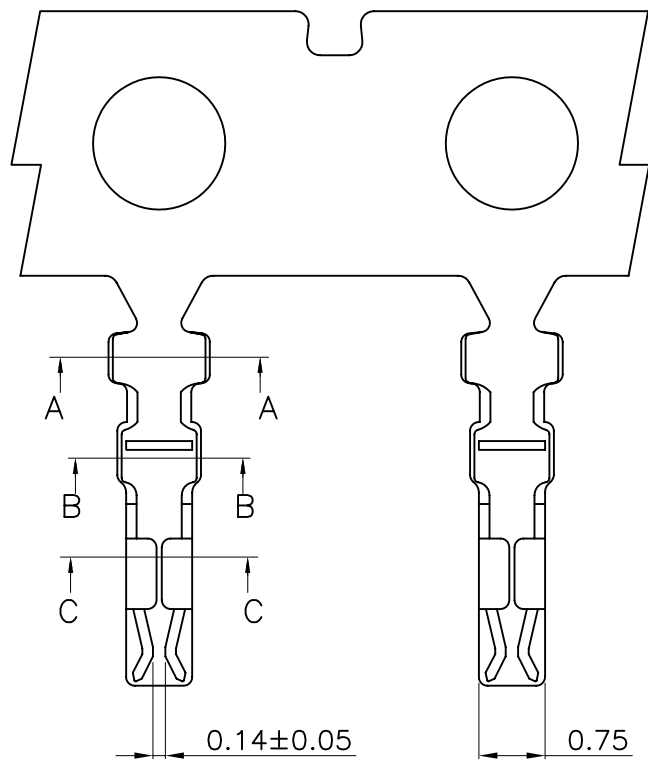


Section A-A



Section B-B



Section C-C

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.12\text{mm}$
2. FINISH: TIN-PLATED OVER NICKEL.
3. APPLICABLE WIRE RANGE: AWG #28 TO #32
4. INSULATION O.D.: $\phi 0.80\text{mm}$ (MAX.)
5. PACKING: 20K/REEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm 3^\circ$


PPOJECTION

照片框

ORDER INFORMATION

PCLK-T-28-LF
SERIES T LEADFREE
28~32 AWG
TERMINAL

DESCRIPTION: WIRE TO BOARD, PLUG, PITCH 1.00MM, CRIMP TYPE CONTACT



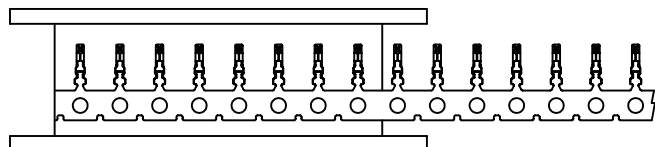


PCAKING MATERIAL

PART NAME	DIM(mm)
CARTON	580*580*210

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
PCLK-T-28	20,000PCS/RE	8 RE/BC	160,000 PCS/BC

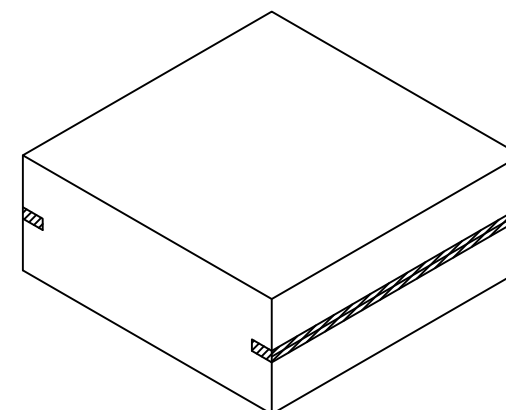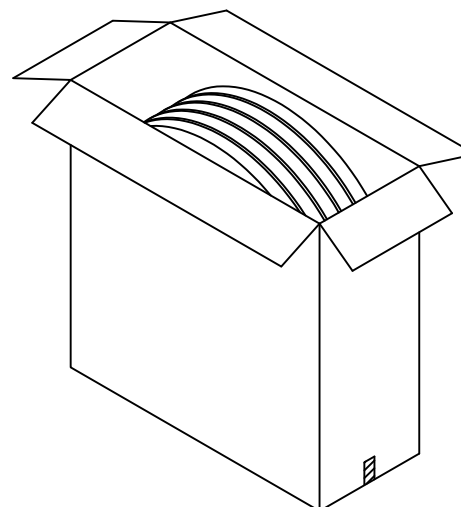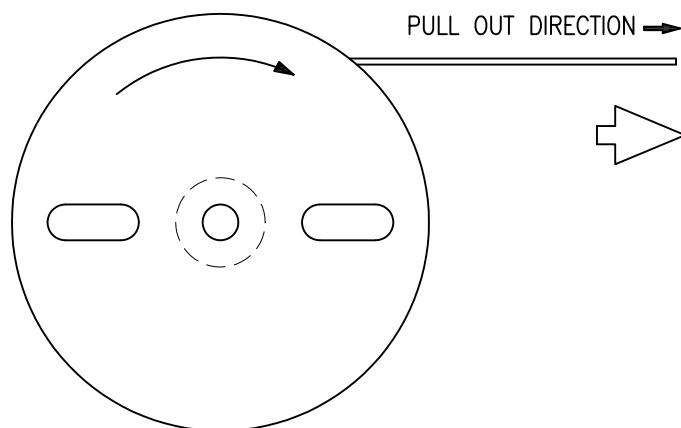

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.08

ANG $\pm 3^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

PCLK-T-28-LF

SERIES T LEADFREE

28~32 AWG

TERMINAL

DESCRIPTION: WIRE TO BOARD, PLUG, PITCH 1.00MM, CRIMP TYPE CONTACT