

Recommend P.C.B Layout

備註 /NOTE

1. 安規 /SAFETY :
 - 1-1. 規格 /RATING : 100V AC MAX OR 12V DC 2A MAX
 - 1-2. 絕緣阻抗 /INSULATION RESISTANCE : 100M MIN AT 500 DC
 - 1-3. 絕緣耐壓 /DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC AT 1 MINUTE
2. 材質 /MATERIAL :
 - 2-1. 鐵殼 /SHELL : 不銹鋼 /STAINLESS
 - 2-2. 膠芯 /HOUSING : LCP
 - 2-3. 端子 /PIN : 磷銅 /PHOSPHOR BRONZE
3. 電鍍 /PLATING :
 - 3-1. 端子 /PIN : 錫,金 10u"/TIN,GOLD 10u"

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

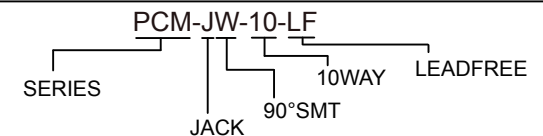

DESCRIPTION: PCMCIA 10PIN 母座成品