
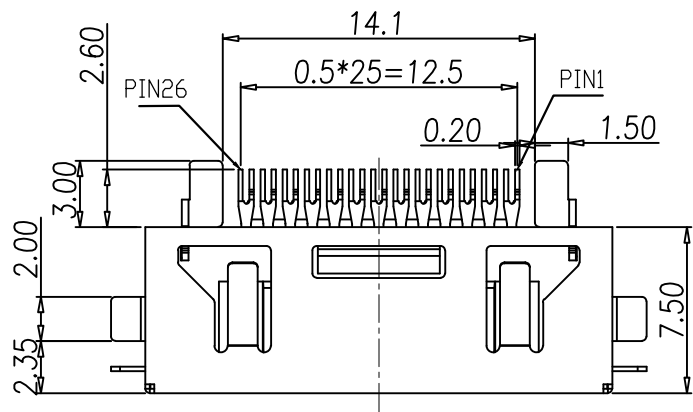
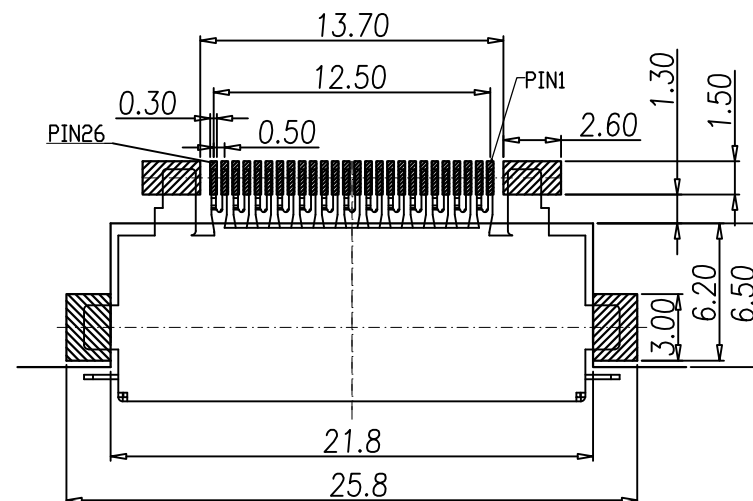
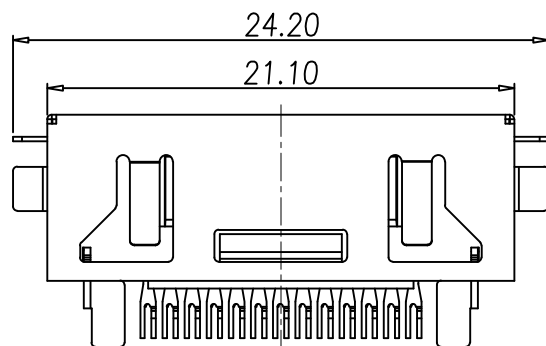
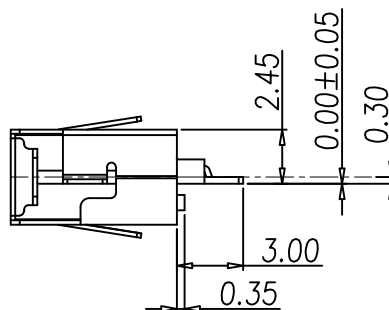


□□□ for Pins and Back GND Tabs.

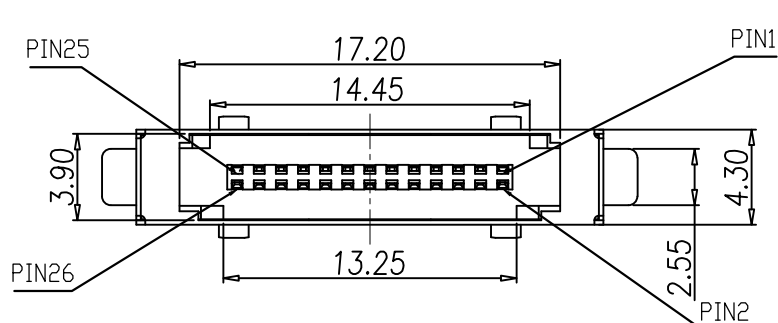

RECOMMEND P.C.B LAYOUT

1. MATERIAL :
 - 1-1. HOUSING : LCP UL94V-0 ;
COLOR : BLACK
 - 1-2. CONTACT : COPPER ALLOY
 - 1-3. SHELL : NICKEL SILVER ALLOY
 - 1-4. GROUND : COPPER ALLOY
2. FINISH :
 - 2-1. CONTACT :
CONTACT AREA : 30u" Min. GOLD PLATED.
SOLDER AREA : GOLD FLISH
UNDER PLATE : NICKEL
 - 2-2. SHELL : MATTE TIN ON OVER ALL
 - 2-3. GROUND : BRIGHT TIN OVER ALL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

PCM-JWF03-26-LF

SERIES | LEADFREE
26 WAY
OFFSET 0.3mm
90°SMT
JACK

DESCRIPTION: PCMCIA 26A(F) 板端(無喇叭口) - 端子全金