


cable ass'y:

UNIT:(MM)

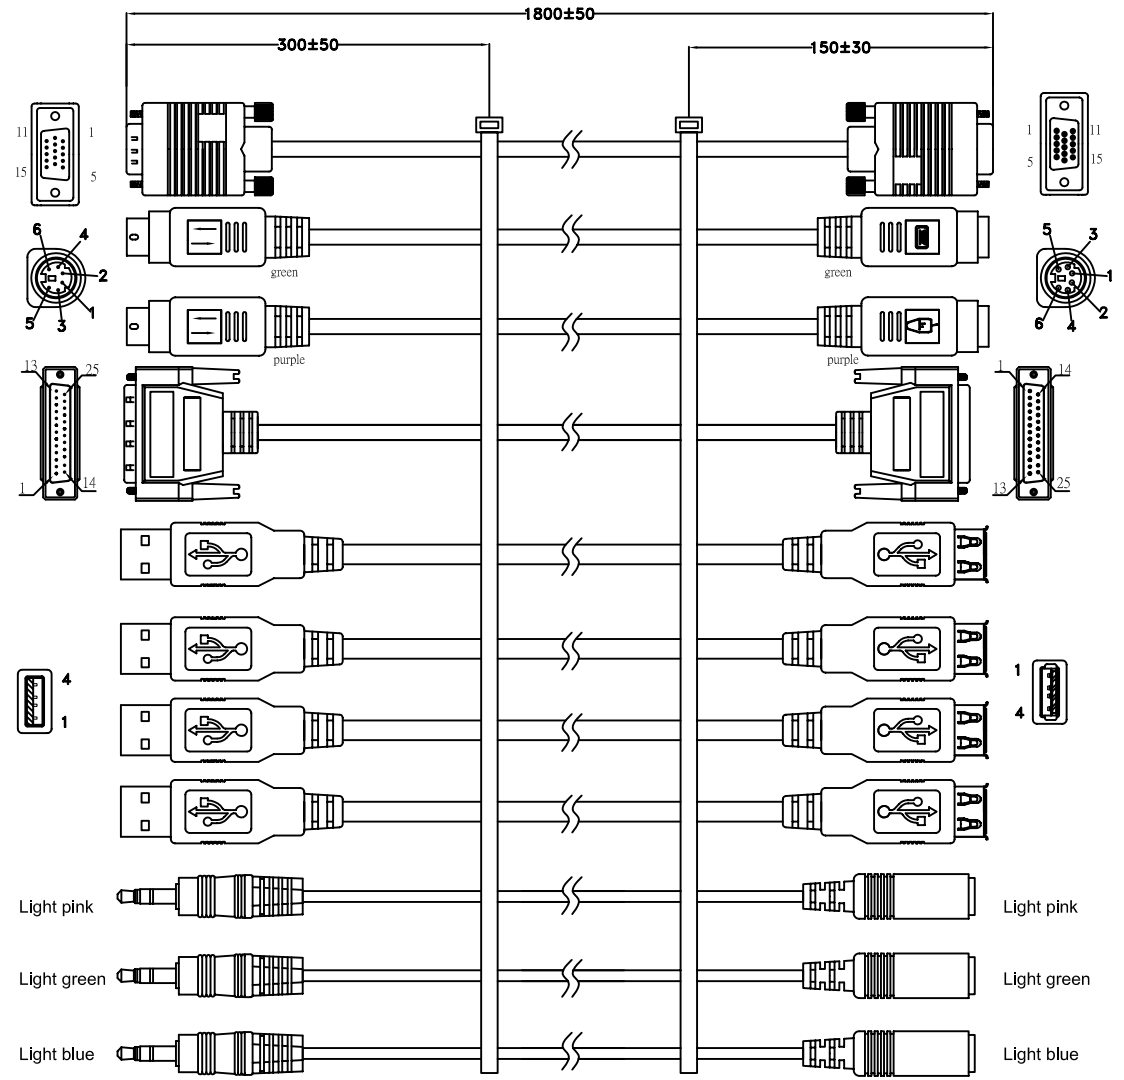


material list:

1. ul 2919 28awg\*(1c+s)\*3c+8c+ADB Beige color;(HD-15P M/F 各1PC)
2. UL 2464 28awg\*6c+AD Beige color;(mini din 6p M/F各2PCS)
3. UL 2464 28awg\*25c+abd beige color;(DB-25P M/F各1PC)
3. UL 2725 28awg\*1p+24awg\*2c+ADB Beige color 1.1Rev.  
(1.1REV. usb a 4p M/F 各4PCS)
4. UL 2547 28awg\*2c+s Beige color (3.5 stereo plug M/F 各3pcs)

packing list:

per pc put into a pe bag.



煜倫股份有限公司

PART NO. PCX-1111-E1M8		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. PCX-1111-E1M8		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1							