



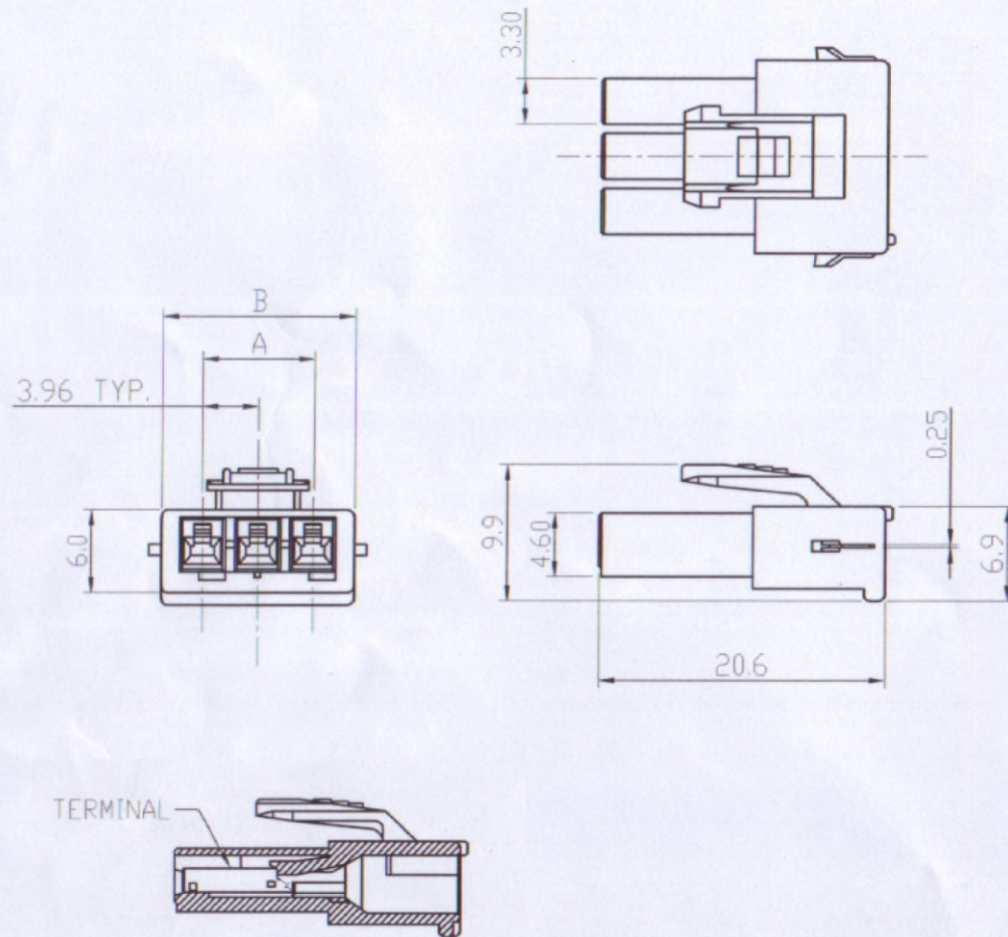

Ordering Information

Circuits	Part No.	Dimension	
		A	B
1 X 2		3.96	9.9
1 X 3		7.92	13.9
1 X 4		11.88	17.8
1 X 5		15.84	21.8
1 X 6		19.80	25.7
1 X 7		23.76	29.7
1 X 8		27.72	33.7
1 X 9		31.68	37.6
1 X 10		35.64	41.6
1 X 11		39.60	45.5
1 X 12		43.56	49.5

SPECIFICATIONS:

1. CURRENT RATING: 10 AC/DC (AWG 16) ES
2. VOLTAGE RATING: 300V
3. WITHSTAND VOLTAGE: 2200V

SECTION VIEW FOR ASSEMBLY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PDL-SH-1Xxx-LF
SERIES | LEADFREE
1X02:02 WAY
1X12:12 WAY
HOUSING
FEMALE

DESCRIPTION: 3.96mm pitch crimp terminal socket