

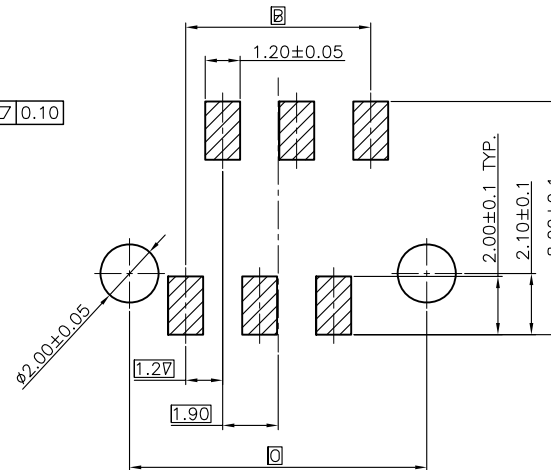

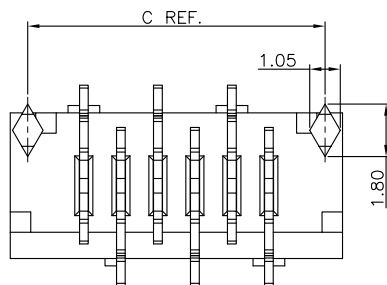
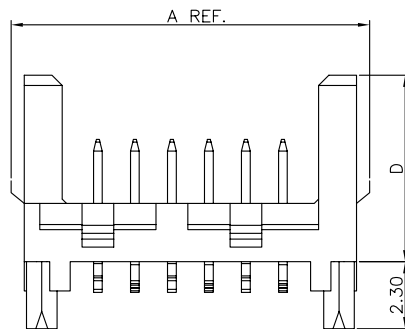


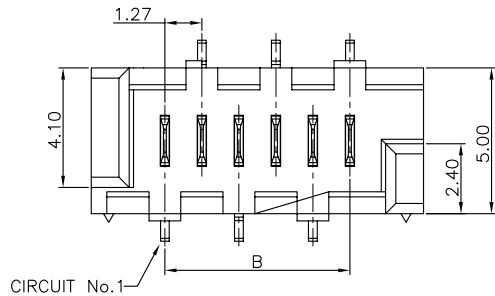

RECOMMENDED P.C.B LAYOUT WITH PCB PEGS
FROM COMPONENT SIDE PCB THICKNESS (1.60±0.14)

Specifications:
Current Rating:1.2A AC/DC
Voltage Rating:32V AC/DC
Contact Resistance:15m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:750V AC For One Minute
Operating Temperature Range:-40°C To +105°C
Materials:
Insulator:High Temp. Plastic(LCP UL94V-0)
Insulator Color:Black
Contact:Copper Alloy
Plating:Tin Plated

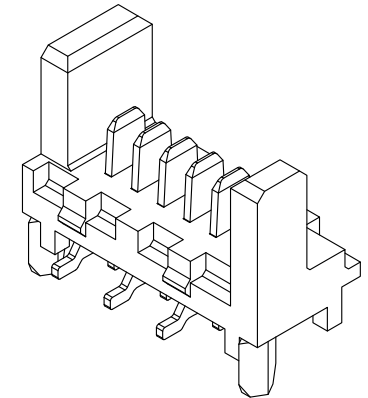

DIMENSION INFORMATION:

NUMBER OF CIRCUITS	DIM A	DIM B	DIM C	DIM D
04	8.86 Δ	3.81	7.66	4.10
06	11.40	6.35	10.20	
08	13.94	8.89	12.74	
10	16.48	11.43	15.28	
12	19.02	13.97	17.82	
14	21.56	16.51	20.36	
16	24.10	19.05	22.90	
18	26.64	21.59	25.44	
20	29.18	24.13	27.98	
22	31.72	26.67	30.52	
24	34.26	29.21	33.06	
26	36.80	31.75	35.60	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PF-PVP41-xx-LF
SERIES
LEADFREE
04~26WAY
4.1mm
POST
180°SMT
MALE

DESCRIPTION:1.27mm Wafer Straight SMT Type