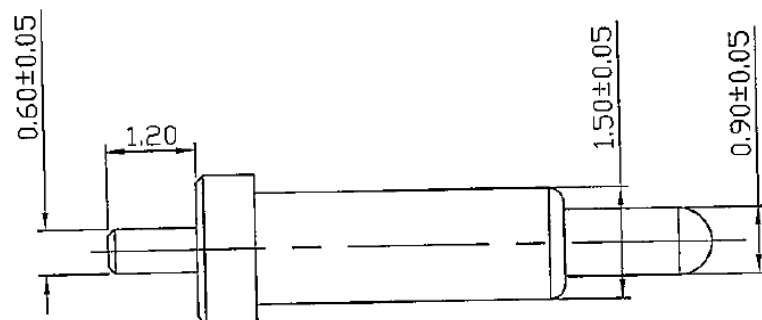

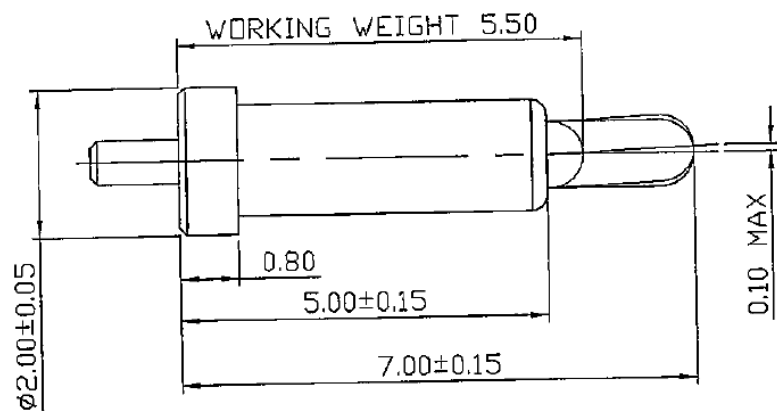


RECOMMENDED P.C.B LAYOUT

NOTES:

- 1 MATERIAL :
 - 1-1 PIN & TUBE : COPPER ALLOY
 - 1-2 SPRING : SWP-B,PIANO WIRE OR EQUIVALENT
- 2 FINSH :
 - 2-1 PIN:OVERALL 15u"MIN.GOLD OVER 50~90u"NICKEL
 - 2-2 TUBE : OVERALL 5u"MIN.GOLD OVER 50~90u"NICKEL
 - 2-3 SPRING ; OVERALL 4u" MIN,GOLD OVER 50~90u"NICKEL
- 3 MECHANICAL SPECIFICATION :
 - 3-1 NORMAL WORKING HEIGHT: 40+15/-10g @ 1.50mm DEFLECTION
 - 3-2 DURABILITY : 10,000 CYCLES
 - 3-3 MAX STROKE : 1.6mm
- 4 ELECTRICAL SPECIFICATION :
 - 4-1 RATING CURRENT : 2A AT 24 VDC
 - 4-2 CONTACT RESISTANCE : 30 mOhms MAX @ 1.3mm DEFLECTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PGP-D-097055-LF
SERIES | LEADFREE
MAX WORKING HEIGHT 5.5mm
TOTAL LONG 7.0mm
0.9 Ø
DIP 180°

DESCRIPTION: