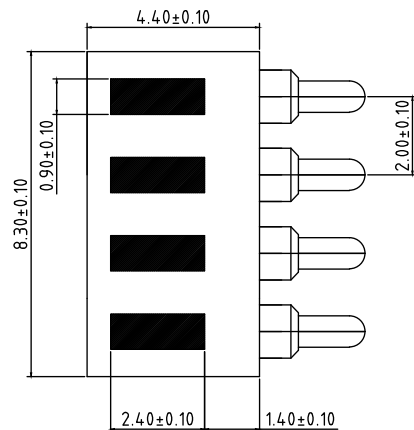
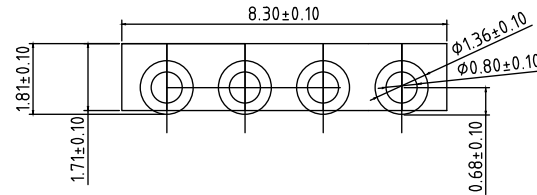
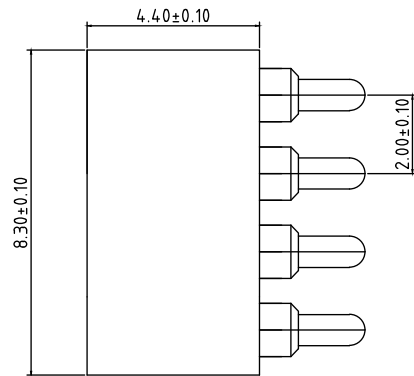


NOTE:

PRODUCT TO BE MET ROHS

1. MATERIAL

HOUSING: LCP, COLOR: BLACK

PLUNGER: BRASS, 16u" GOLD PLATING 50u" MIN. NICKEL UNDERPLATED.

BARREL: BRASS, 1u" GOLD PLATING OVER 50u" MIN. NICKEL UNDERPLATED

SPRING: SUS304

2. SPECIFICATION:

ELECTRICAL:

CURRENT RATING: 12VDC, 1A

INSULATION RESISTANCE: 100m Min.

CONTACT RESISTANCE: 50mΩ Max.

ENVIRONMENTAL:

TEMPERATURE RANGE: -40~85°C

3. MECHANICAL FUNCTION:

SPRING PROBE FORCE:

WORKING STROKE (PIN): 50gf±20gf AT 1.0mm RECOMMEND STROE

MAX. STROKE: 1.5mm FULL STROKE.

DURABILITY: 10,000 CYCLES/0.8mm STROKE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

PGP20-W18X-1X04-LF

SERIES

LEADFREE

04 WAY

NON POST

HIGH 1.81mm

90°SMT

DESCRIPTION: