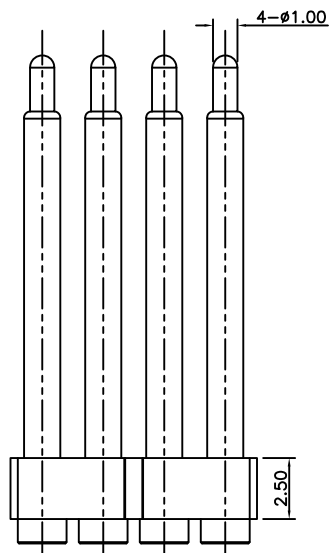
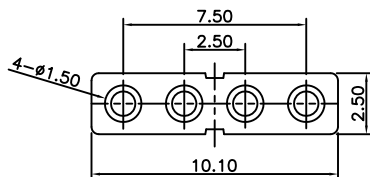


RECOMMENDE PCB LAYOUT

Note:

.Materials

Housing : Black HTN/UL94V-0

Plunger & Barrel : Brass

Spring : Stainless Steel

.Plating

Plunger : 10 μ " min. Au over, 50 μ " min. Ni

Barrel : 10 μ " min. Au over, 50 μ " min. Ni

.Electrical

Contact Resistance : 50m Ω max
at Working Height(Quiescence)

Current Rating: DC 12V , 1A

.Mechanical

Total Height : 20.00 mm

Working Stroke : 2.00 mm

Spring Force : 60g $\pm$ 20% at Working Stroke

Durability : 10,000 Cycles minimum

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PGP25-V200X-1X04-LF

SERIES
LEADFREE
04 WAY
NON POST
TOTAL HIGH 20.0mm
180°SMT

DESCRIPTION: POGO PIN